FEB 14 1903

Interior New Auditorium Annex, Chicago. Holabird & Roche, Architects.

Irving K. Pond, Des. Lorado Taft, Sculpt.

THE INLAND ARCHITECT AND NEWS RECORD

Entered at the Postoffice at Chicago as second-class matter.

CONTENTS.

EDITORIAL:

A City Architect Appointment Controversy—Causes of Lack of Interest in Chapter Meetings 45

MODERN CONSTRUCTIVE METHODS 46
By Edward C. Shankland, C. E.

THE RELATION OF THE ARCHITECT AND ENGINEER TO THE DESIGN AND ERECTION OF GOVERNMENT BUILDINGS 48
By John Stephen Sewell.

THE EFFECT OF WIND PRESSURE ON STRUCTURES (*To be continued*) 49
By Robert M. Neilson.

OUR ILLUSTRATIONS 50

THE INTERIOR OF THE NEW AUDITORIUM ANNEX 51

PAINTS IN ARCHITECTURE 52

MOSAICS 52

INDEX TO ADVERTISEMENTS IX

NORTH-WESTERN TERRA COTTA CO.

WORKS AND OFFICE:
Clybourn and Wrightwood Avenues.

Branch Office: 1118 Rookery Building,
CHICAGO.

J. W. TAYLOR,

REMOVAL NOTICE:

After May 1, 1902, Monon Bldg., 324 Dearborn St. Telephone No. 1500 Harrison.

ARCHITECTURAL PHOTOGRAPHS,

BUILDINGS, INTERIORS, DETAILS, Etc.

Promise to purchase two dozen from the lot at $4.00 per dozen, unmounted, and I will send 200 from which to make the selection.

FITCH SASH LOCKS

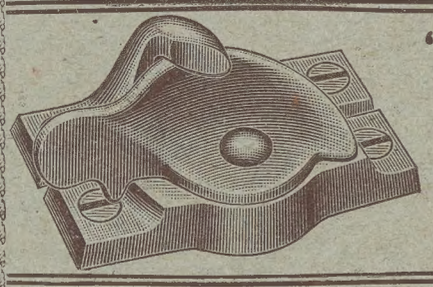

"THE PERFECT WINDOW FASTENER."...

SEND FOR CATALOGUE AND WORKING MODEL

THE W. & E. T. FITCH CO., NEW HAVEN, CONN.

THE WINSLOW BROS. COMPANY

CHICAGO

ORNAMENTAL IRON AND BRONZE AND MONUMENTAL BRONZE STATUARY

THE WINSLOW ELEVATOR & MACHINE CO.

HIGH-GRADE ELECTRIC AND HYDRAULIC ELEVATORS

FOR SALE.

Two passenger and one freight, Hale, 100-foot travel elevators; vertical cylinders; been in use some years, but in first-class condition. Also one 18½ by 14 by 14 Duplex Delamater pump. Apply at office of

William Donaldson & Co.,
Minneapolis, Minn.

Battle Creek Interior Finish Co., Ltd.

Battle Creek, Mich., U.S.A.

Write us for Veneered Oak Doors and Colonial Columns



PITKIN'S PREMIUM PAINT

FOR PRESERVING AND BEAUTIFYING.

We will be pleased to send a handsome color-card, appropriately framed in Flemish oak, to architects on application.

Geo. W. Pitkin Co.

Station "C," CHICAGO.

Advance News

INDICATING

Chances to Sell

PLANS, FIXTURES,
MATERIALS, FURNITURE,
MACHINERY,

May be secured with promptness, accuracy and thoroughness, and at reasonable rates, from

THE PRESS CLIPPING BUREAU,

Robert and Linn Luce,

78 Park Place, NEW YORK. 68 Devonshire St., BOSTON
Pike Bldg., CINCINNATI. Cooper Bldg., DENVER.

Please mention THE INLAND ARCHITECT when corresponding with Advertisers.

SCHOOL HOUSE HEATING *and* VENTILATION

IS NO LONGER A MATTER OF SECONDARY IMPORTANCE in the eyes of the educator. When he demands an ample supply of properly warmed fresh air he realizes that it will not only maintain the health of the pupils, but also materially increase their mental activity.

It is the province of our Public Building Department to study such problems, and to assist in the solution.

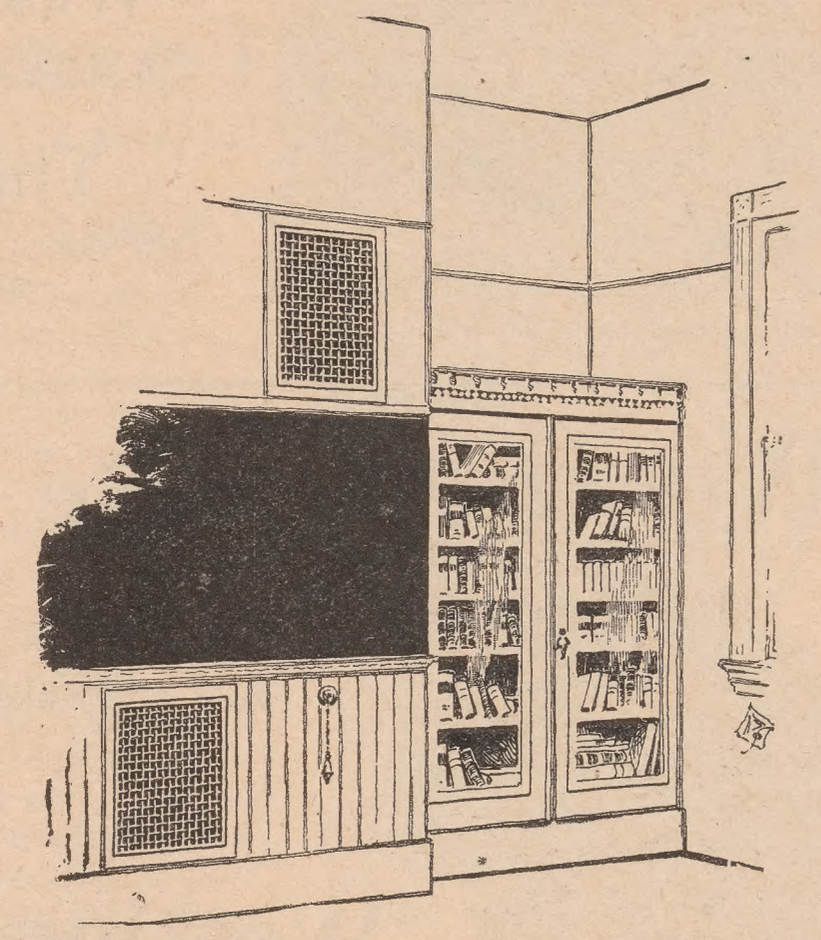

B. F. STURTEVANT CO.
BOSTON, MASS.

NEW YORK CHICAGO PHILADELPHIA LONDON

317

TAYLOR OLD STYLE

Is the only brand of roofing tin made in the same way as in 1830.

Roofs of this tin laid then last to the present day.

This record is a sufficient guarantee.

N. & G. TAYLOR CO.
Philadelphia

There are catalogues—and catalogues. We have just issued one—No. 535, "Metallic Fixtures," which is worth the asking. Sent express paid on request.

Ours is no sheet-iron product. To those uaware that the finest cabinet-work and furniture are made in metal the above will prove a revelation.

ART METAL CONSTRUCTION CO.,
Jamestown, N. Y.

Mention Catalogue Number.

Westinghouse Gas Engines

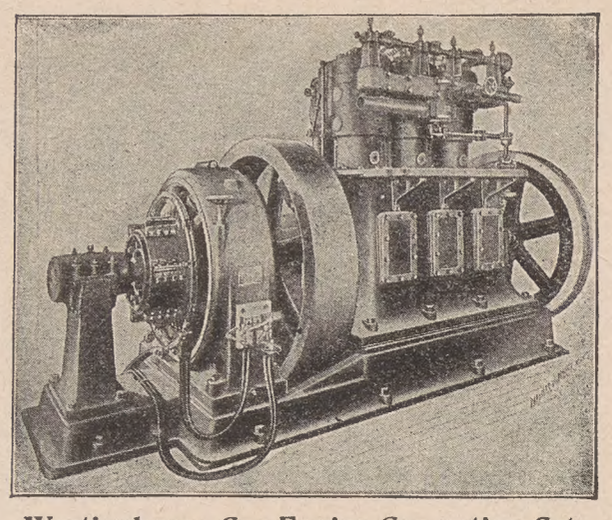

Westinghouse Gas Engine Generating Set.

For providing Light and Power in Private Residences, Office or Public Buildings. They are Smooth, Noiseless and Efficient in Operation.

For particulars address nearest office of

Westinghouse, Church, Kerr & Co.

NEW YORK, BOSTON, PHILADELPHIA, Engineers, PITTSBURG, CHICAGO, DETROIT,

Sell the product of

The Westinghouse Machine Co.

PITTSBURG, Designers and Builders of CHICAGO,

STEAM ENGINES, GAS ENGINES, STEAM TURBINES.
RONEY MECHANICAL STOKERS.

Westinghouse Induction Motors

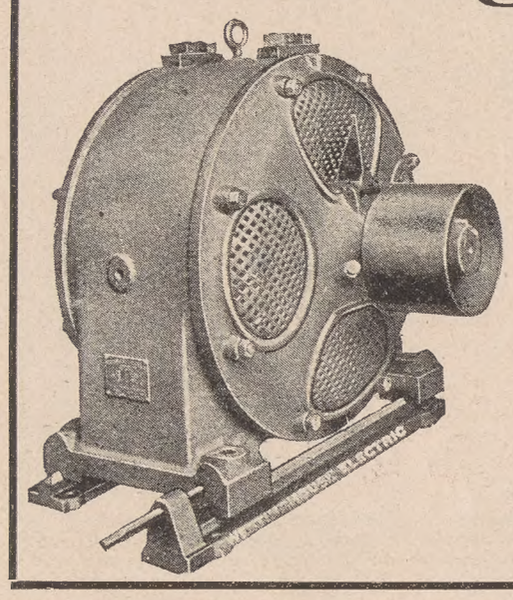

Require no skilled attendance.

Are controlled by a switch placed where most convenient.

WRITE FOR CIRCULAR 1050

Westinghouse Electric & Mfg. Co.

SALES OFFICES IN ALL LARGE CITIES PITTSBURG, PA.

P-15

THE WINKLE TERRA COTTA CO.

MANUFACTURERS OF

Architectural Terra Cotta

IN ALL COLORS.

OFFICE:

Rooms 502 and 503, Century Building,
ST. LOUIS, MO.

Works: CHELTENHAM, ST. LOUIS.

"Greatest Success of Its Age"

The Four-Track News

An Illustrated Magazine of Travel and Education

Published Monthly
by the Passenger Department
of the

New York Central & Hudson River R. R.

The Four-Track News will be sent free to any address for a year on receipt of 50 cents.
Single copies, 5 cents.

Address:

GEORGE H. DANIELS, General Pass. Agent,
Grand Central Station - - New York

Please mention THE INLAND ARCHITECT when corresponding with Advertisers.

DESIGN AND DURABILITY — TRADE "Standard" MARK — UNSURPASSED

The Name **"Standard"**

IS CAST IN RELIEF ON EVERY PIECE OF THE

Porcelain Enameled Ware

That has received the highest awards at all World's Fairs and Expositions

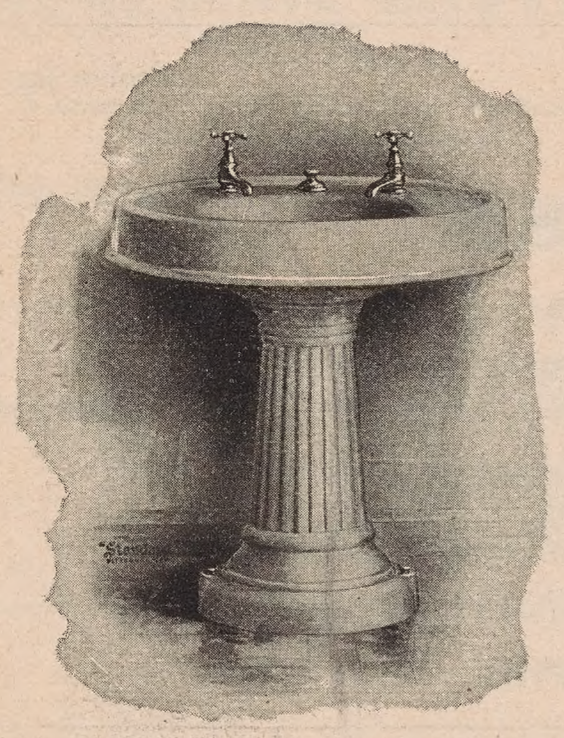

The guarantee which this name carries with it is absolute and a perfect assurance against the annoyances inseparable from the use of inferior and non-guaranteed brands.

It is essential to perfect sanitation that all sanitary equipment such as Bathtubs, Lavatories, Water Closets, etc., have a surface that is hard and absolutely non-porous.

"Standard" PORCELAIN ENAMEL provides these features in the highest possible degree, combining the daintiness and purity of china with the strength and durability of iron.

Book of Modern Bathrooms showing a series of designs, together with descriptions and prices, mailed free on application.

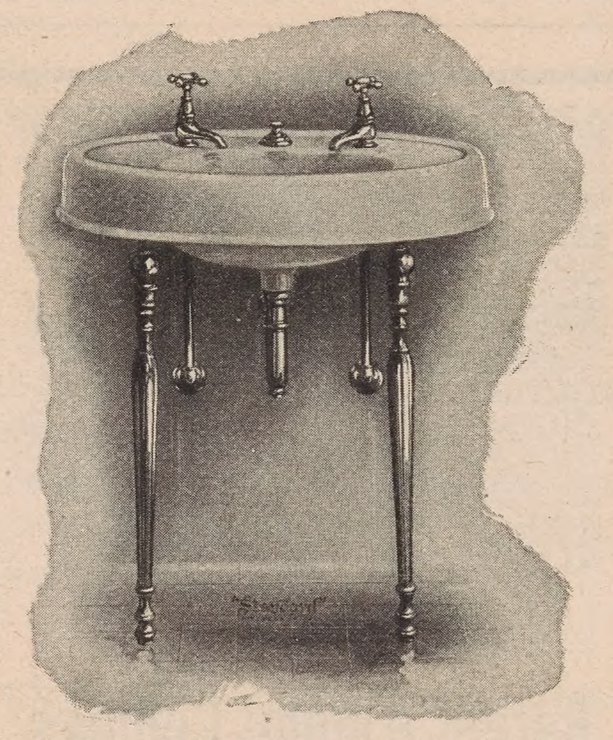

STANDARD SANITARY MFG. CO.,
PITTSBURGH, PA.

VAN NOORDEN'S METAL CORNICES

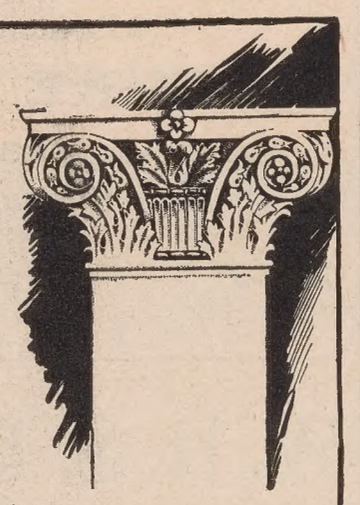

give character to the architecture of the building. They are true to the artistic conception, and give height and tone to the whole structure. Cheapness would be suicidal to purposes of ornamentation. If you want the best, you want Van Noorden's. Yet prices are within the easy financial reach of all. Complete data cheerfully furnished gratis. Write for it.

E. VAN NOORDEN CO.,
944 Massachusetts Ave., Boston.

ANY PAINT WILL CRACK

If repainting be too long delayed. When the old paint has become brittle the new paint will pull it off.

ZINC WHITE PAINTS

Retain their oil longer than other paints, hence do not require repainting so frequently. In this and their great spreading power lies their superior economy. Their superior beauty is self evident.

FREE—Our Practical Pamphlets:
"The Paint Question,"
"Paints in Architecture,"
"Specifications for Architects,"
"French Government Decrees."

The New Jersey Zinc Co.
11 Broadway, NEW YORK.

LOUIS J. MILLET
(Successor to HEALY & MILLET)
Interior Decorator
151 MICHIGAN AVE., CHICAGO

Leaded Glass. Glass Mosaic. Frescoing

Sidewalk Lights

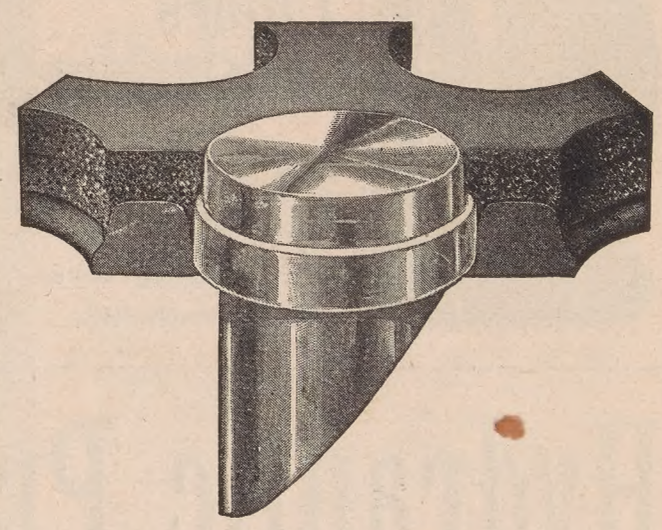

CONCRETE REFRACTING LENS.

SEND FOR CATALOGUE

Brown Bros. Mfg. Co.
Established in 1860

Main Office and Factory:
Twenty-second Street and Campbell Avenue
Telephone, Canal 115
Branch Office—N. W. Cor. Jackson Boul. and Clinton St.
Telephone, Main 4085

Chicago

Please mention THE INLAND ARCHITECT when corresponding with Advertisers.

The Millar Gas Machine

SAFE, DURABLE, AUTOMATIC

Simple In Construction — Economical In Operation

APPROVED BY ALL INSURANCE COMPANIES

THE MILLAR-GANTZ CO.
DIXON, ILL.

TEL. HARRISON 3652

THOMAS HAWKES
LANDSCAPE ARCHITECT

DESIGNS PREPARED FOR PARKS, CEMETERIES, PRIVATE ESTATES, SUB-DIVISIONS, ETC.

CORRESPONDENCE SOLICITED

1532 MONADNOCK BLOCK CHICAGO

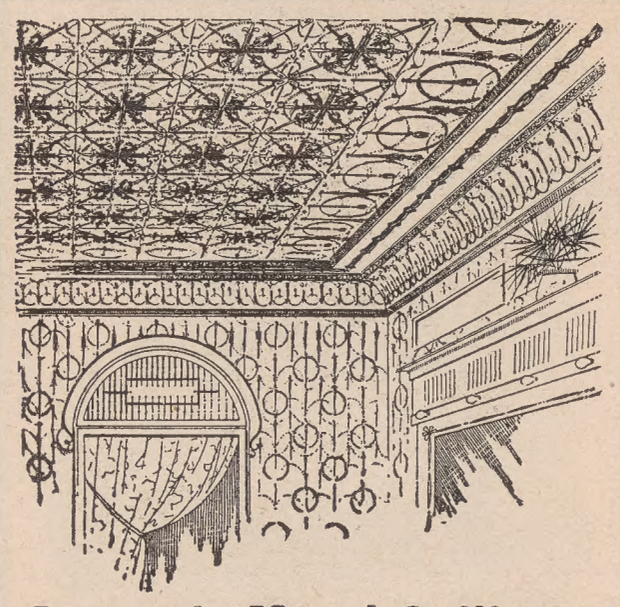

Berger's Metal Ceilings

Are symmetrical and pleasing to the eye and command the admiration of all. They can be used in all classes of buildings, are easy to apply, and highly ornamental. They don't shrink, crack, get water-soaked, or fall off. They are safe and sanitary. Their durability makes them the most economical ceilings in existence. Our "Classified Designs" embrace a variety of styles, and there is no building that we can not match in its style of architecture. Send for our booklet "A New Idea in Metal Ceilings"—'tis free.

The Berger Mfg. Co., Canton, Ohio
Eastern Branch, 210 E. 23d St., N. Y.
Western Branch, 19-21 S. Main St., St. Louis, Mo.

THE CHEAPEST GOODS
Do not always cost the least.

Established 1844.

Peerless Mortar Colors

Are the Brightest, Strongest and Most Durable.

THEIR ULTIMATE COST IS THEREFORE THE LOWEST.

SAMUEL H. FRENCH & CO.
PHILADELPHIA.

Send for Samples.



AMERICAN SIDEWALK LIGHT CO.

MANUFACTURERS OF ALL KINDS OF
Concrete and Hyatt Sidewalk, Floor and Skylight Work,
AND ALL KINDS OF IRONWORK.
Coal-Hole Covers of every description always on hand.
Tel. Monroe 643. 156-158 West Ohio St., CHICAGO.

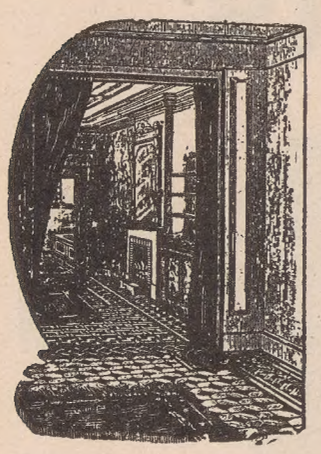

Hardwood Floors

Wood Carpets, Parquet Floors, Rug Borders.

Send for book of designs.

E. B. MOORE & CO.
37 Randolph Street,
CHICAGO, ILL.

Put into the White House by the U. S. Government.

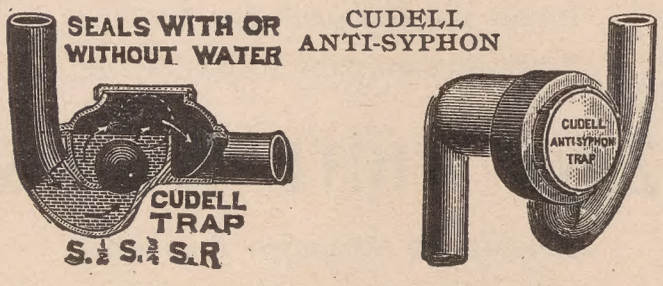

F. E. CUDELL'S
Patent Sewer-Gas and Backwater Trap
For Wash-Bowls, Sinks, Bath and Wash Tubs,
CLEVELAND, OHIO.

W. W. ABBOTT,

MANUFACTURER OF
PICTURE FRAMES
MATS AND PASSEPARTOUTS
FRAMES MADE TO ORDER. ARCHITECTURAL DRAWINGS REMOUNTED.

Telephone Harrison 3455 — 255 Wabash Ave., CHICAGO

W. H. S. Lloyd Co.

REPRESENTING
A. Sanderson & Sons, of London.

ENGLISH WALL PAPERS

JAPANESE LEATHERS
GRASS CLOTH

Finest Stock of Foreign Wall Papers in U. S.

26 E. 22d St., New York

Hydraulic Press Brick Co.

Missouri Trust Building, ST. LOUIS, MO.

TOTAL ANNUAL CAPACITY, 300,000,000 BRICKS.

American Hydraulic Press Brick Co.,	St. Louis, Mo.
Chicago Hydraulic Press Brick Co.,	Chicago, Ill.
Cleveland Hydraulic Press Brick Co.,	Cleveland, Ohio.
Eastern Hydraulic Press Brick Co.,	Philadelphia, Pa.
Findlay Hydraulic Press Brick Co.,	Findlay and Toledo, Ohio.
Illinois Hydraulic Press Brick Co.,	St. Louis, Mo.
Kansas City Hydraulic Press Brick Co.,	Kansas City, Mo.
Kelley Brick & Tile Co.,	West Superior, Wis.
Menomonie Hydraulic Press Brick Co.,	Minneapolis, Minn.
New York Hydraulic Press Brick Co.,	Rochester, N. Y.
Ohio Press Brick Co.,	Zanesville, Ohio.
Omaha Hydraulic Press Brick Co.,	Omaha, Neb.
Union Press Brick Works,	St. Louis, Mo.
Washington Hydraulic Press Brick Co.,	Washington, D. C.

Please mention THE INLAND ARCHITECT when corresponding with Advertisers.

THE J. W. REEDY ELEVATOR CO.

Passenger and Freight

ELEVATORS.

83 to 91 Illinois Street, CHICAGO.

31-33 Tenth Avenue, NEW YORK CITY.

FOR INFORMATION ABOUT

U. S. MAIL CHUTES

WHICH ARE

A necessity in office buildings and hotels, write to the sole makers,

THE CUTLER M'F'G CO., Rochester, N. Y.

PATENTED. AUTHORIZED.

LAUNDRY MACHINERY

ALEXIAN BROTHERS HOSPITAL,
BELDEN AND RACINE AVES.

CHICAGO, Feb. 26, 1900.

Chicago Rival Machine Co.,
43-45 S. Canal St., City.

Gentlemen,—We beg leave to acknowledge the receipt of your patent shirt, collar and cuff ironing machine, "The Rival," and also your shirt starcher.

The "Rival" is a perfect success as an ironer, and it affords us great pleasure to express our unqualified praise of it.

The starcher works like a charm and the fact that it works noiselessly is a source of great satisfaction to us.

It is our intention to have both of your machines placed in all of our institutions. We remain,

Very truly yours,
ALEXIAN BROTHERS HOSPITAL.
Per. Bro. Superior.

WANTED

A line of medium and low priced wood mantels for 1903, by the largest distributers in the world. Address Advertiser,
811 Boyce Building, Chicago.

SUPERINTENDENT

A first-class superintendent with years of practical experience upon all classes of city work, especially large constructions, wishes to be placed in communication with architect or builder requiring such services. He is fully recommended by this office. Address Superintendent, care Inland Architect.

CRANE VALVES
ESTABLISHED 1855

"WHATEVER IS WORTH DOING AT ALL IS WORTH DOING WELL."

Telephone 555

THE HENRY O. SHEPARD COMPANY

212-214 Monroe St. CHICAGO.

Printers, Embossers Blank Book Makers

We do all kinds of Printing and Binding. Rush Work a Specialty.

.. Observe typography of THIS JOURNAL as a fair specimen of our grade of work ..

Florida and New Orleans

via

Queen & Crescent Route

Southern Railway

and connecting lines

Through Pullman service from Chicago, Cleveland, Pittsburg, Louisville, daily except Sunday; Detroit and Toledo, Tuesday, Thursday and Saturday; to St. Augustine without change.

FROM CINCINNATI

3 Trains to Florida, 8:30 a.m., 8:05 p.m., 9:15 p.m.
2 Trains to New Orleans, 8:05 p.m., 8:30 a.m.

Route to Florida either via Chattanooga Atlanta or Jacksonville; or via Asheville and Savannah.

Write for rates and printed matter.

W. C. RINEARSON, G. P. A.,
CINCINNATI

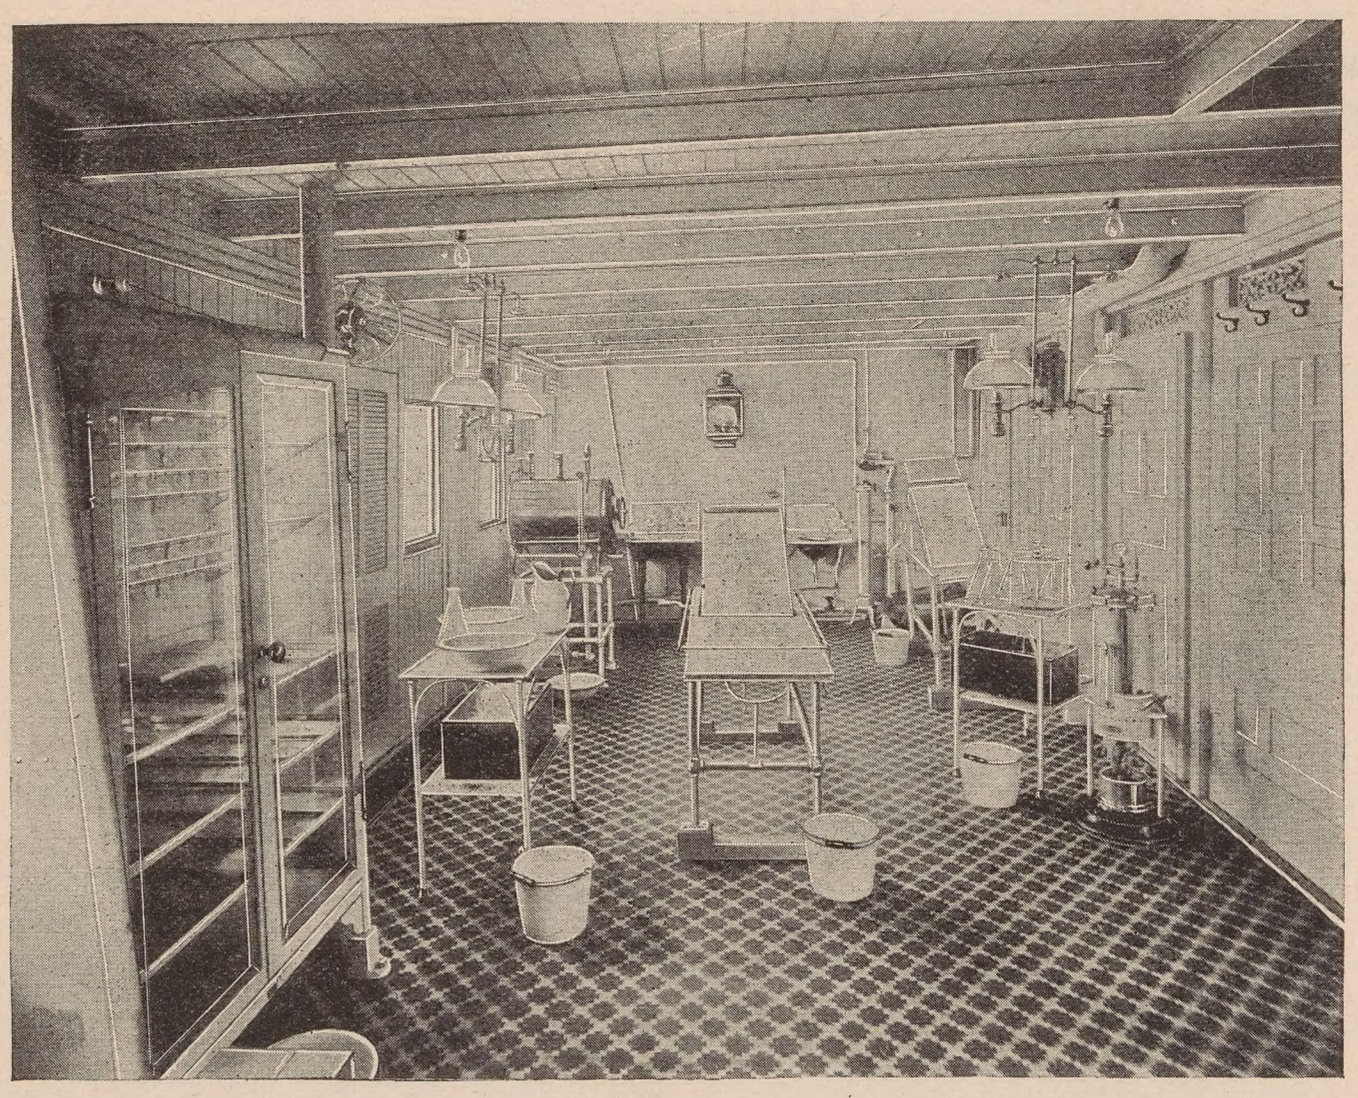

Interlocking Rubber Tiling

As laid by us in
U. S. Hospital Ship "Relief"
(operating room)

Thoroughly sanitary, each tile water and germ proof, interstices filled with water and germ proof cement. Also in use on U. S. Hospital Ship "Solace," Brooklyn City Hospital, Willard State Hospital, Utica State Hospital, Manhattan State Hospital. Noiseless, non-slippery and extraordinarily durable. Laid directly on wood, stone or iron. Call or write.

NEW YORK BELTING & PACKING CO., Ltd.

CHICAGO . . . . . 150 Lake Street
NEW YORK . . . . . 25 Park Place
PHILADELPHIA . . . 724 Chestnut Street
BALTIMORE . . Baltimore Rubber Co. 101 Hopkins Place
ST. LOUIS . . . . 411 North 3d Street
SAN FRANCISCO . . . 509-511 Market St.
LONDON, ENG. The B. & S. Folding Gate Co. 19 to 21 Tower Street, Upper St. Martin's Lane, W. C.

Soft, rich color effects are produced on shingles by the use of Shingletint.

There are many brands of shingle stains in the market, but only one **Shingletint,** which means much to the consumer, who may safely buy it and know he is getting the best shingle stain made.

Shingletint is a scientific combination of linseed oil, coloring matter, creosote and the necessary drying agents; its use not only beautifies but prolongs the life of the shingles.

Finished woods and descriptive literature sent free upon application.

BERRY BROTHERS, Limited
Varnish Manufacturers,

New York Philadelphia Chicago St. Louis
Boston Baltimore Cincinnati
San Francisco

Factory and Main Office, DETROIT

JENKINS IMPROVED AUTOMATIC AIR VALVES

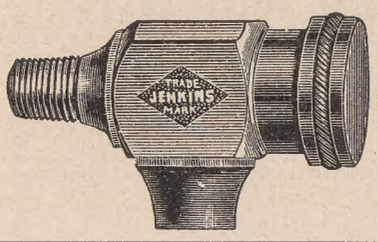

Suitable for high or low pressure. Take no more room than an ordinary air cock. Endorsed by the leading steam experts as the best made and the quickest working. All genuine stamped with our Trade-Mark.

JENKINS BROTHERS, NEW YORK. BOSTON. CHICAGO. PHILADELPHIA.

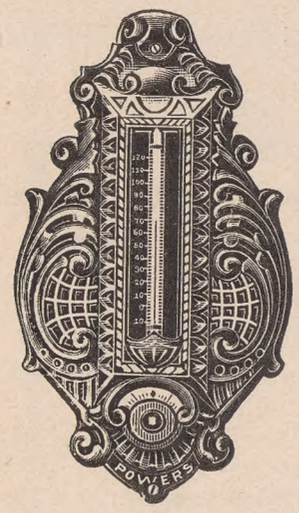

Avoid Extremes of Heat and Cold

BY USING

THE POWERS SYSTEM

OF

Temperature Regulation.

Applicable to all kinds of heating apparatus in Schools, Churches, Residences, Office Buildings, etc.

Successfully applied to the control of heat in RAILWAY CARS.

SEND FOR CATALOGUES.

The Powers Regulator Co., 40 Dearborn Street, Chicago.
111 Fifth Avenue, New York. 224 Franklin Street, Boston.

"GIANT" METAL SASH CHAIN

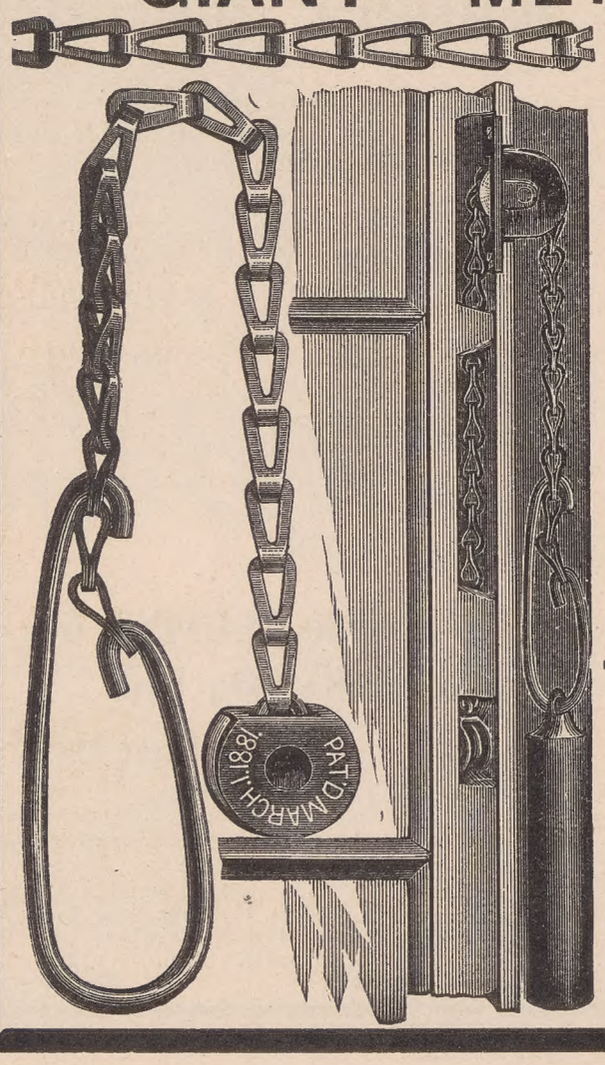

Has not been equaled in quality in 20 years. Durability guaranteed. The bronze costs 40 per cent more than any other Sash Chain metal.

Full line of Sash and Cable Chains, Sash Pulleys and Fixtures.

MANUFACTURED BY

THE SMITH & EGGE MFG. CO.
BRIDGEPORT, CONN.

WRITE FOR OUR LATEST CATALOGUE.

A Profitable Way to see The West

is to join one of the personally conducted California excursions of the Santa Fe Route.

Congenial companions are assured.

Special conductors relieve you of all care and contribute materially to your enjoyment.

No extra charge.

Inquire of

T. A. GRADY,
Manager California Tourist Service,
The Atchison, Topeka & Santa Fe Railway,
109 Adams Street, Chicago.

KINNEAR
STEEL ROLLING
·DOORS·SHUTTERS·
THE KINNEAR MFG. CO.
COLUMBUS OHIO, U.S.A.
BOSTON – CHICAGO – PHILA.
83 WATER ST.— 112 CLARK ST.— 101 CHESTNUT ST.

Sheet-Steel Indian Canoes
Non-sinkable and indestructible. 14 feet long, 39 inch beam.

Twenty-Two Dollars, Net. EXTRA FOR FISH FOX AND SECTIONAL BOAT.
W. H. MULLINS, 310 Depot St., SALEM, OHIO.

THE ALTON'S ENGINEER.

IF YOU WILL SEND THE ADDRESS OF A PERSON WHO, WITHIN A YEAR, WILL HAVE USE FOR THE CHICAGO & ALTON RAILWAY

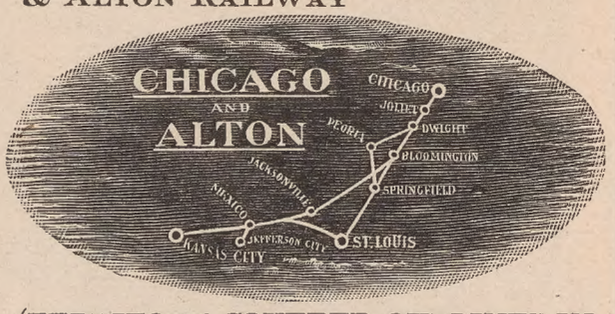

(TERRITORY COVERED OUTLINED IN ABOVE MAP), WE WILL MAIL TO YOU A PICTURE, 4½ X 3 INCHES, OF THE ALTON'S ENGINEER. IF, IN ADDITION, YOU WILL TELL US IN WHAT PUBLICATION YOU READ THIS ADVERTISEMENT, WE WILL SEND TO YOU A PAMPHLET ABOUT THE BIGGEST CAMERA IN THE WORLD.

GEO. J. CHARLTON,
GENERAL PASSENGER AGENT, CHICAGO & ALTON RAILWAY,
CHICAGO, ILLINOIS.

INDEX TO ADVERTISEMENTS.

	Page
Architectural Drawing.	
Deane, E. Eldon	XV
Architectural Iron Works.	
The Winslow Bros. Co	II
American Sidewalk Light Co.	IX
Architectural Photographers.	
Taylor, J. W	II
Architectural Views.	
Taylor, J. W	II
Boats.	
W. H. Mullins	X
Boiler Covering.	
The Keasbey & Mattison Co.	XII
Bricks (Pressed).	
Chicago Hydraulic Press Brick Co	IX
Findlay Hydraulic Press Brick Co	IX
Illinois Hydraulic Press Brick Co	IX
Kansas City Hydraulic Press Brick Co	IX
Menominee Hydraulic Press Brick Co	IX
Omaha Hydraulic Press Brick Co	IX
St. Louis Hydraulic Press Brick Co	IX
Brick (Enameled).	
Hydraulic Press Brick Co	IX
Brick (Ornamental).	
Chicago Hydraulic Press Brick Co	IX
Findlay Hydraulic Press Brick Co	IX
Hydraulic Press Brick Co	IX
Illinois Hydraulic Press Brick Co	IX
Kansas City Hydraulic Press Brick Co	IX
Menominee Hydraulic Press Brick Co	IX
Omaha Hydraulic Press Brick Co	IX
Builders' Hardware.	
Orr & Lockett	XVI
The Yale & Towne Mfg. Co.	XVI
Builders' Sundries.	
The Yale & Towne Mfg. Co.	XVI
Building Papers.	
Cabot, Samuel	XII
Cements.	
French, S. H., & Co	VI
Clothes Dryers.	
Cordage.	
Samson Cordage Works	XVI
Creosote Stains.	
Cabot, Samuel	XII
Decorators' Supplies.	
Drawing Material and Implements.	
Abbott, A. H., & Co	XII

	Page
Electric Plants.	
Westinghouse, Church, Kerr & Co	IV
The Westinghouse Machine Co	IV
Elevators.	
The J. W. Reedy Elevator Co	VII
Elevator Supplies.	
Elevator Supply & Repair Co.	V
Engineers.	
Westinghouse, Church, Kerr & Co	IV
The Westinghouse Machine Co	IV
Fireproof Doors.	
Kinnear Mfg. Co.	X
Fireproof Shutters.	
Kinnear Mfg. Co	VI
Fire Extinguisher.	
Yantacaw Mfg. Co	XII
Fireproofing.	
National Fireproofing Co	XIV
Pioneer Fireproofing Co	XIV
The Roebling Construction Co	XII
Floor Polish.	
Butcher Polish Co	XV
Gas Engines.	
Westinghouse, Church, Kerr & Co	IV
The Westinghouse Machine Co	IV
Grilles.	
Waddell Mfg. Co	X
Hardware.	
The Yale & Towne Mfg. Co.	XVI
Heating.	
Buffalo Forge Co	XIII
B. F. Sturtevant Co	III
Heating and Ventilating Apparatus.	
Buffalo Forge Co	XIII
Pierce, Butler & Pierce	XVI
B. F. Sturtevant Co	III
Ice and Refrigerating Machinery.	
Westinghouse, Church, Kerr & Co	IV
The Westinghouse Machine Co	IV
Instruction.	
American Correspondence School	XI
Interior Finish.	
Battle Creek Interior Finish Co	II
Locks.	
The Yale & Towne Mfg. Co.	XVI
Mail Chutes.	
Cutler Manufacturing Co	VII
Mechanical Stokers.	
Westinghouse, Church, Kerr & Co	IV
The Westinghouse Machine Co	IV
Metal Ceilings.	
Berger Mfg. Co	VI

	Page
Metallic Fixtures and Furniture.	
Art Metal Construction Co	III
Monuments.	
Blake, Chas. G., & Co	XII
Mortar Colors.	
French, S. H., & Co	VI
Moldings, Mirrors, Frames.	
W. W. Abbott	IX
Paints, Oils and Varnishes.	
Berry Bros	VIII
Joseph Dixon Crucible Co	XV
New Jersey Zinc Co	V
Pitkin, Geo. W., Co	II
Smith, Edward, & Co	XVI
Pencils.	
Joseph Dixon Crucible Co	VI
Plumbers' Fittings.	
Crane Co	VI, XIV
Standard Sanitary Mfg. Co.	V
Printers.	
The H. O. Shepard Co	VII
Railroads.	
Big Four Route	XV
Chicago & Alton	VII, X
Chicago & North-Western R'y	X
Chicago, Milwaukee & St. Paul	IX
Delaware, Lackawanna & Western	XIV
Denver & Rio Grande R. R.	XV
Grand Trunk Lines	IX
Illinois Central	XIV
Monon and C. H. & D. Route	XI
Missouri Pacific R'y	VIII
New York Central R. R.	IV
Queen & Crescent Route	VII
Rio Grande & Western	VI
Southern R'y	X
Southern Pacific Co	X
Santa Fe Route	X
Wisconsin Central	XV
Reflectors.	
Frink, I. P.	XV
Roofing Tin.	
N. & G. Taylor Co	III
Rolling Doors and Shutters (steel).	
Kinnear Mfg Co	X
Sanitary Appliances.	
Cudell, F. E.	IX
Standard Sanitary Mfg. Co.	V
Sash Cords and Chains.	
Smith & Egge Mfg. Co	VIII
Samson Cordage Works	XVI
Sash Locks.	
The W. & E. T. Fitch Co.	II
Schools.	
Sheathing and Deadening Quilt.	
Cabot, Samuel	XII
Shingle Stain.	
Berry Bros	VIII
Cabot, Samuel	XII
Dexter Bros	XV

	Page
Sidewalk and Vault Lights.	
Brown Bros. Mfg. Co	V
Richards & Kelly	VII
American Sidewalk Light Co.	IX
Skylights (Metal).	
Van Noorden Co	V
Snow Guards.	
Folsom Snow Guard Co	X
Spring Hinges.	
Smith & Egge Mfg. Co	X
Stained and Decorative Glass.	
Louis J. Millet	V
Steam Engines.	
Westinghouse, Church, Kerr & Co	IV
The Westinghouse Machine Co	IV
Steam Fittings.	
Crane Co	XV
Steam Loops.	
Westinghouse, Church, Kerr & Co	IV
The Westinghouse Machine Co	IV
Steel Rolling Doors.	
Kinnear Mfg. Co	VIII
Steel Rolling Shutters.	
Kinnear Mfg. Co	VIII
Steel Shutters.	
American Sidewalk Light Co.	IX
Kinnear Mfg. Co	X
Stokers.	
Westinghouse, Church, Kerr & Co	IV
The Westinghouse Machine Co	IV
Temperature Regulator.	
The Powers Regulator Co	VIII
Terra Cotta.	
Northwestern Terra-Cotta Works	II
Winkle Terra Cotta Co	IV
Tile (Rubber).	
New York Belting & Packing Co., Ltd	VII
Trees.	
Peterson, P. S., & Son	X
Valves (Steam).	
Jenkins Bros	X
Crane Co	VII, XIV
Varnish.	
Chicago Varnish Co	X
Ventilation.	
Buffalo Forge Co	XIII
Wall Papers.	
W. H. S. Lloyd Co	IX
Window Lines.	
Samson Cordage Works	XVI
Wood Carpet.	
Moore, E. B., & Co	VI

The Pioneer Limited

Famous Train of the World.

Chicago — St. Paul — Minneapolis

VIA

THE ST. PAUL ROAD

(Chicago, Milwaukee & St. Paul R'y)

Equipment and Service Unequaled.

Time tables, maps and information furnished on application to

F. A. MILLER, General Passenger Agent, Chicago, Ill.

DRAFTSMEN WANTED

Permanent positions for high-class draftsmen of education and experience.

GREEN & WICKS
ARCHITECTS
110 Franklin St. - Buffalo, N. Y.

WE SELL
TREES and SHRUBS
AT RIGHT PRICES
PETERSON'S NURSERY
164 La Salle St. CHICAGO
Send for Illustrated Catalog FREE

FLORIDA
AND THE
SOUTH
Again the Great
Southern Railway

offers to the Public unexcelled service to Florida and all Southern Tourist points.

LIMITED TRAINS, ELEGANT SLEEPING, PARLOR, DINING and CAFE CARS

"THE FLORIDA LIMITED"

leaves Chicago daily in the evening, arriving Jacksonville the second morning, less than 35 hours en route, passing through Cincinnati, Chattanooga, Atlanta, Macon and Jesup, and making connection at Jacksonville with trains for East and West Coast points in Florida. Pullman sleepers Chicago to Cincinnati and through Pullman sleepers Cincinnati to Jacksonville.

ANOTHER LIMITED TRAIN

leaves Chicago daily for Jacksonville in the morning; passing through Cincinnati, Asheville and Savannah—a daylight ride through the famous "Land of the Sky." Parlor cars to Cincinnati and through sleepers from Cincinnati to Jacksonville. Arrive Jacksonville 9:15 a.m., making connections for East and West Coast points in Florida.

You can also go via St. Louis or Louisville.

Winter Tourist Tickets

at greatly reduced rates now on sale

For full particulars see your nearest ticket agent, or write or call on

J. S. McCullough, N. W. P. A.,
225 Dearborn St.,
Chicago, Ill.

G. B. Allen, A. G. P. A.,
St. Louis, Mo.

SOUTHERN PACIFIC
SUGGESTS
CALIFORNIA
PROMISES

Blue Skies, Shining Seas, Snowy Mountains
Vineyards, Orchards, Grain Fields
Wealth, Health, Prosperity, and Happiness

FROM **CHICAGO** **$33**

commencing February 15, continuing until April 30.

Choice of routes east of Ogden, El Paso and New Orleans.
Highest class tourist car service.

Address any Southern Pacific Agent.
W. G. NEIMYER, General Agent, 193 CLARK ST., CHICAGO, ILL.

Folsom New Model Snow Guard



Specified by leading architects to hold the snow on all pitch roofs, entirely obviating all chance of injury to life or to the property it protects. The only perfect device for this purpose. It is made in various forms for old and new roofs of slate, shingle, tile or metal. Full information on application.

THREE HISTORIC BUILDINGS.
Faneuil Hall,
Old South Church,
King's Chapel,
Boston,
Are Fitted with this Snow Guard.

FOLSOM SNOW GUARD CO.
ROSLINDALE (BOSTON), MASS.

GRILLES
Original designs, beautifully carved to fit any space.
Also Carved and Embossed Mouldings, Capitals, Newel Post Tops, Rope and Twist Balusters.
Waddell Mfg. Co.
7 Plainfield Ave., Grand Rapids, Mich., U. S. A.
Illustrated General Catalogue No. 18. Over 1,000 designs. Mailed for ten cents in stamps.

THE NORTH-WESTERN LINE

To the West

The North-Western Line is the only double track railway from Chicago to the Missouri River.

The double track is now completed between Chicago and Council Bluffs. Four fast trains each way daily between Chicago and Omaha, three trains daily to the Pacific Coast and two to Denver.

A double track railway across the western prairies means a great deal of history-making, empire-building, American energy.

The story of the western country and of the Pioneer Line that has played so great a part in its progress is interestingly told in a booklet which will be sent on receipt of a two-cent stamp to pay postage.

W. B. KNISKERN, Passenger Traffic Manager, CHICAGO

SITUATION WANTED.

A quiet young lady who has finished a technical course in mechanical drawing and is experienced in designing, would like to work in an architect's office in Chicago.
Address "A. B.,"
Office of Inland Architect.

Please mention THE INLAND ARCHITECT when corresponding with Advertisers.

THE INLAND ARCHITECT AND NEWS RECORD

Vol. XL. ADVERTISERS' TRADE SUPPLEMENT. No. 6

SHINGLE STAINS.

For several years the architects have sought for some process which would give the new shingles on a building the silver gray which time has alone been able to produce. About two years ago Coolidge & Carlson, of Boston, began the buildings for Thomas W. Lawson's stock farm, "Dreamwold," and Mr. Lawson demanded a stain for his building which would produce the silver gray in a few weeks.

All samples were thrown aside until Dexter Brothers offered their new No. 54 stain. This was adopted, and if Dexter Brothers were only able to show every architect in the country these buildings, there is not an architect who would not adopt it.

The new house, Knollcrest, at York Harbor, Maine, and the new houses there of Mr. J. Lynde Stetson and Mr. Lockwood de Forest, were stained with this this summer.

When the No. 54 stain is first applied, it is a brown, but changes within two weeks to the weathered effect which could only be obtained by waiting two years. The stain must not be used on redwood or Washington cedar shingles, as they will not weather.

A section of a side of a house covered with shingles has been placed in each of the cities of Boston, Chicago, New York and Philadelphia, at the addresses below, so that architects can see how the shingles look after staining and being exposed for a month:

105 Broad street, Boston.

Samuel Bettle, Jr., 218 Race street, Philadelphia.

H. M. Hooker Company, 57 West Randolph street, Chicago.

W. S. Hueston, 81 Fulton street, New York.

THE BUFFALO FAN SYSTEM.

Anything new bearing upon improved methods of heating, ventilating and drying is always of interest, and a thorough review of the Buffalo Fan System, as put forth in a neat pamphlet by the Buffalo Forge Company, is now ready for general distribution. It consists of twenty pages, handsomely illustrated not only with detailed cuts, making clear the practical working of the system, but also of numerous buildings lately erected and supplied.

The descriptive matter fully explains the principle and application. The apparatus required consists of a boiler and heater coils, enclosed with a sheet-iron casing, connecting with the air ducts which lead to the various compartments of the building and are also connected with a fan supplied with motive power. Proper air-regulating dampers, and means of returning the hot condensed water from the coils to the boiler, complete the necessary equipment.

The fan exhausts fresh air from out of doors over the mass of steamheating coils, or blows air over these coils, depending on whether the apparatus is of the "drawing through" or "blowing through" type. This properly heated air is now forced into air ducts and discharged, at a height of eight or ten feet above the floor line, in the apartment to be heated or ventilated. The many advantages of this modern system may easily be perceived, and its general adoption where understood not to be wondered at.

THE BERGER MANUFACTURING CO.

The number of calendars sent out this year illustrative of manufactures of interest to architects and builders is very large. One of the most attractive is that issued by the Berger Manufacturing Co., of Canton, Ohio, and made noticeable by a finely executed cut of their extensive plant.

In a neatly printed letter to their friends and patrons which accompanies the gift of the calendar, the company state that the coming year will find them better prepared than ever to meet the requirements of all buyers of sheet metal and sheet metal goods. During the past year they have increased facilities in every department, and as they are now operating their own steel plant, together with rolling and tin mills, feel better able than before to promptly execute orders on short notice and at saving prices. It is probable there are few, if any, larger sheet metal works in the world, and their output of black and galvanized sheets and classic metal ceilings are standards among the architects of the country. They also execute any orders in roofing, conductor pipes, cornices, skylights, or any of the various side lines wherein sheet metal forms a basis, and are always glad to furnish careful estimates as to material and cost.

Specification Reminders

CONTRACTORS

GENERAL.

Clarence I. Wolfinger, 164 La Salle St., Chicago.

HEATING

FURNACE.

Robinson Furnace Co., 107 Lake St.

STEAM AND HOT-WATER BOILERS.

Kellogg-Mackay-Cameron Co., General Offices, Chicago, Minneapolis, Minn., Kansas City, Mo.

INTERIOR FINISH

Clarence I. Wolfinger, 164 La Salle St., Chicago.

WANTED — Architectural Draughtsman in Chicago Office. Must be thoroughly practical, familiar with ordinary construction and able to take entire charge of work after sketches are complete, making all details, etc. Address, stating experience, wages, etc., "W," INLAND ARCHITECT, Manhattan Bldg, Chicago.

A GOOD ROAD TO CINCINNATI.

The Monon Route and C. H. & D. R'y run four trains daily from Chicago to Cincinnati. The day trains leave Dearborn Station, Chicago, at 8:30 A. M. and 12:00 noon, and are equipped with elegant parlor and dining cars. The night trains leave at 9:00 P. M. and 2:45 A.M. These trains are equipped with elegant sleepers and compartment cars, the sleepers on the latter train being ready for occupancy at 9:30 P. M. All trains stop at 22d st., 47th st., and 63d st., Chicago.

City Ticket Office, 232 S. Clark Street, CHICAGO.

Perspective Drawing

BY Correspondence. A thorough and comprehensive course, dealing in a clear and concise manner with practical office problems.

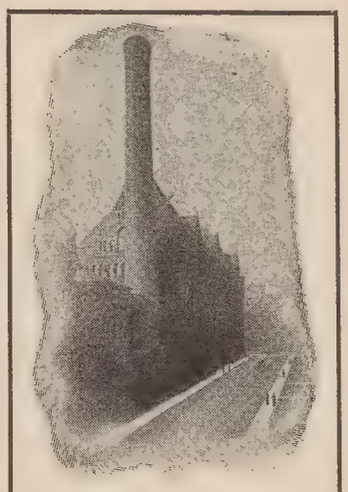

MAIN BUILDING ARMOUR INSTITUTE.

INSTRUCTION UNDER MEMBERS OF FACULTY OF ARMOUR INSTITUTE OF TECHNOLOGY

Courses also offered in

Heating, Ventilation and Plumbing

Electrical and Steam Engineering

Architecture

The **Engineering** curriculum includes

Mechanical, Locomotive and Marine Engineering, Navigation, Mechanical Drawing, Sheet Metal Work. Textile Manufacturing under foremost authorities. Also 40 short Special Engineering Courses.

In addition to their regular instruction papers, students in full Engineering courses are furnished a Technical Reference Library (in ten volumes) as a help in their studies.

AMERICAN SCHOOL OF CORRESPONDENCE

at

Armour Institute of Technology

CHICAGO, ILL.

Mention Inland Architect.

HOPPIN & KOEN, ARCHITECTS, NEW YORK

Cabot's Shingle Stains..

MADE OF THE BEST PIGMENTS, PURE LINSEED OIL AND CREOSOTE, THE BEST WOOD PRESERVATIVE KNOWN.

The Standard Stains for over twenty years

Samples sent on request

Samuel Cabot

Sole Manufacturer

28 Dearborn Avenue, CHICAGO — 70 Kilby Street, BOSTON

The Yantacaw Chemical Fire Extinguisher

NO Acid used, nor poisonous gas generated
Danger from explosion
Danger from Chemical or stream to person or fabric
Periodical recharging, testing or polishing

Always in the accustomed place and ready for instant use.
No mechanism to become defective.
Can be recharged in from twelve to twenty seconds.
Much more powerful and efficient than carbonic acid gas machines.
Made in various sizes capable of charging 25, 50 and 100 gallons of water without recharging; with the twin Yantacaw, a continuous charged stream can be obtained.

SEND FOR DESCRIPTIVE BOOKLET

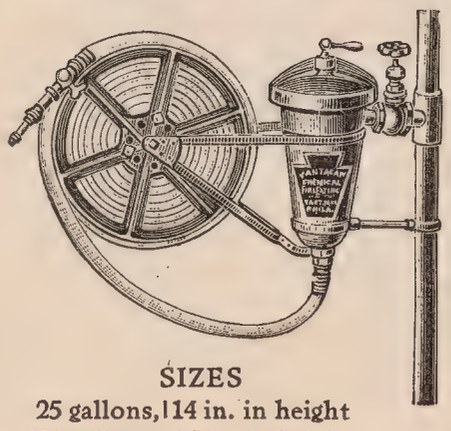

SIZES
25 gallons, 14 in. in height
100 gallons, 36 in. in height

Yantacaw Manufacturing Co., 809 LAND TITLE BUILDING, PHILADELPHIA.

The Roebling System of Fire-Proof Construction.

HIGHEST EFFICIENCY IN THE FIRE AND WATER TESTS OF THE NEW YORK BUILDING DEPARTMENT, AND NOW THE RECOGNIZED STANDARD OF FIRE-PROOF CONSTRUCTION.

THE ROEBLING CONSTRUCTION CO.,

121 Liberty Street, NEW YORK CITY. — *171 Lake Street, CHICAGO, ILL.*

SEND FOR CATALOGUE.

DRAWING INSTRUMENTS

A. H. ABBOTT & CO.

Drawing Supplies,

Instruments, Tracing Cloth, Papers, Colors
Scales, Levels, Transits, Etc.
BLUE PRINTS.
50 Madison Street, CHICAGO.

R. P. GORMULLY MAUSOLEUM
Erected by CHAS. G. BLAKE & Co.

We make
MAUSOLEUMS
as they ought to be made, of good material and properly cut, following the plans correctly.

Please do not overlook us when you have

Anything in GRANITE

from a door-sill or polished column to a Monument or Mausoleum.

CHAS. G. BLAKE & CO.
748 WOMAN'S TEMPLE, CHICAGO, ILL.
Carving and lettering artistically done with pneumatic hammers.

MAGNESIA Steam Pipe Coverings

HEAVY DAMAGES
TO BE COLLECTED AGAINST ALL INFRINGERS

IN THE SUITS against the
Philip Carey Manufacturing Company
American Magnesia Company
American Magnesia Covering Company
Schoellkopf, Hartford & Hanna Co.

The Court has required the defendants to make answer to our bill.

THEIR DEMURRER OVERRULED

Suit has been entered against the C. W. Trainer Manufacturing Co., of Boston.

All persons are warned not to engage in any piracy of our patents, as suits will promptly follow against all Infringers.

Keasbey & Mattison Company
AMBLER, PENN.

Entrance Detail.

WEISSINGER-GAULBERT APARTMENT BUILDING, LOUISVILLE, KENTUCKY.

Kenneth McDonald and J. F. Sheblessy, Architects

ENTRANCE DETAIL, BACHELOR APARTMENTS, PHILADELPHIA.

FREDERICK M. MANN, ARCHITECT.

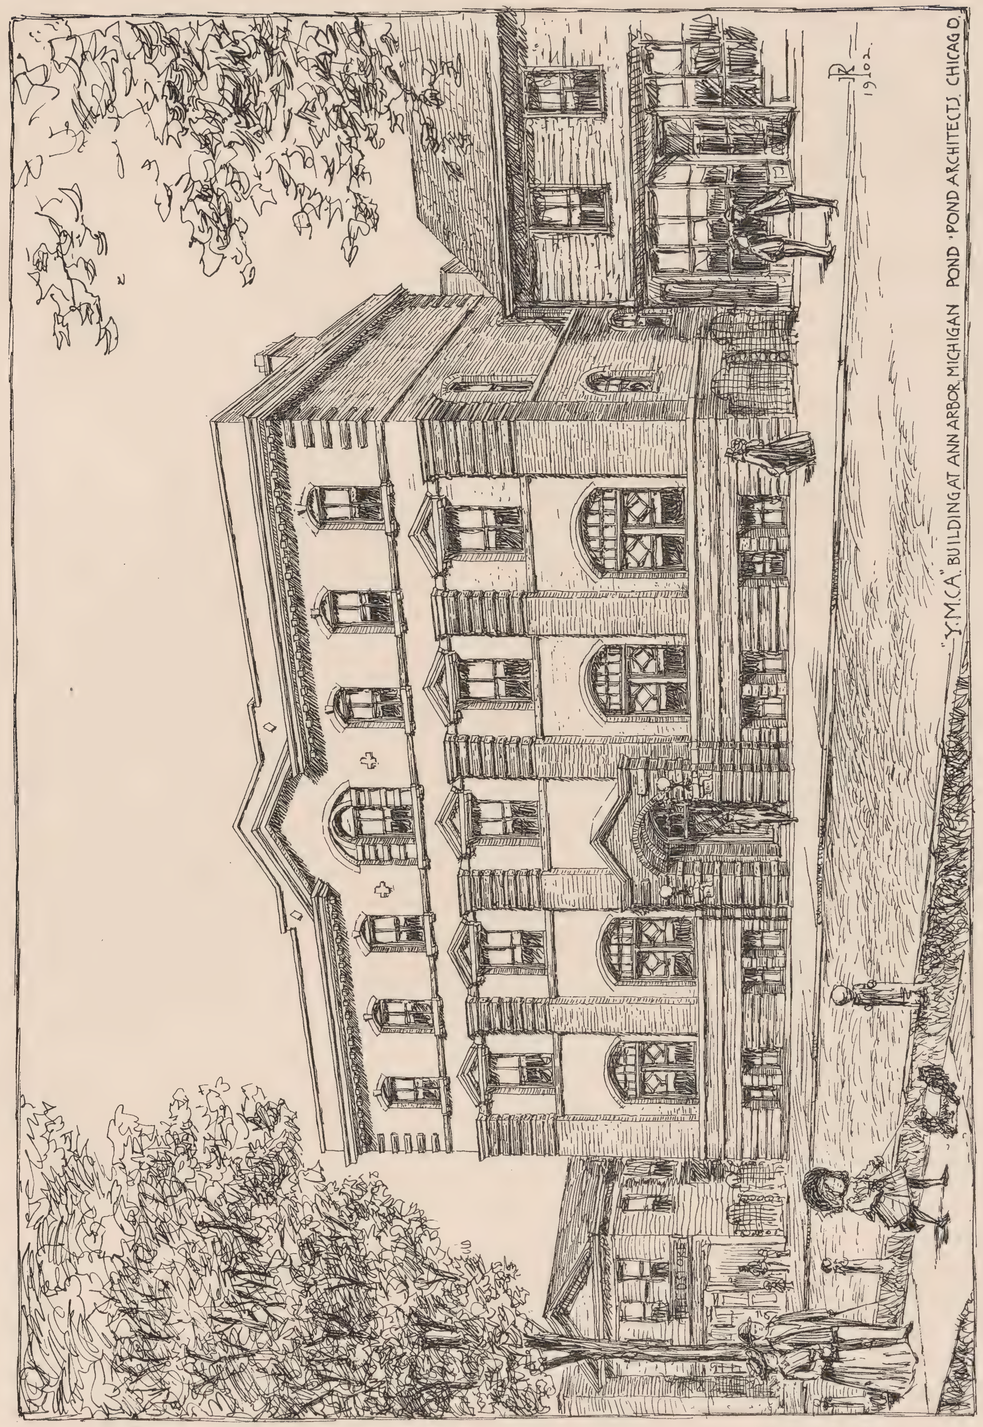

HOUSES, GRAND BOULEVARD, CHICAGO.

PEABODY & BEAULEY, ARCHITECTS.

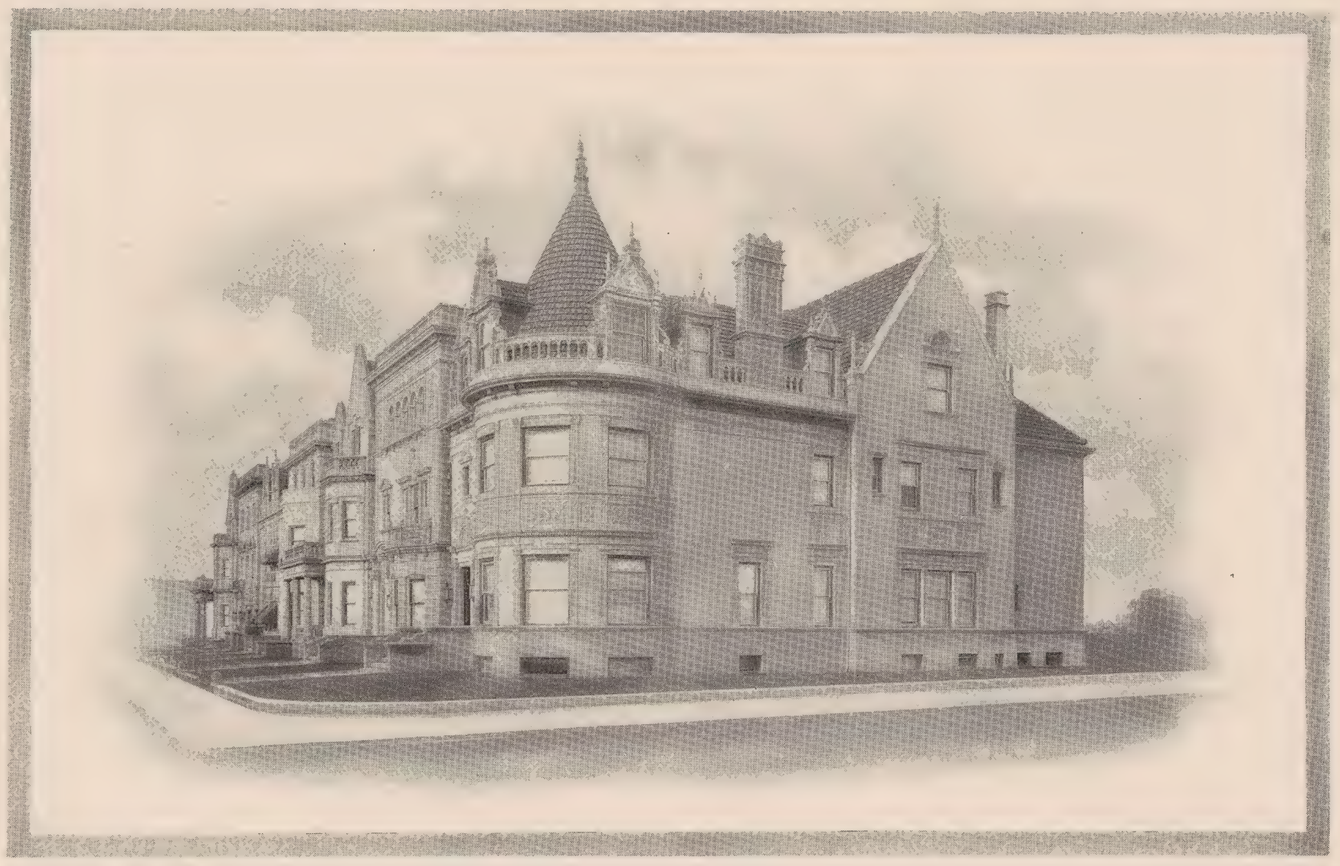

HOUSES, GRAND BOULEVARD, CHICAGO.

PEABODY & BEAULEY, ARCHITECTS.

ENTRANCE DETAIL.

VIEW IN MARBLE CORRIDOR.

MARBLE STAIRWAY.

VIEWS OF THE NEW AUDITORIUM ANNEX, CHICAGO.

HOLABIRD & ROCHE, ARCHITECTS.

"THE ENGLISH ROOM"—PRIVATE DINING-ROOM.

Decorations by Mandel Bros., Chicago.

"THE FRENCH ROOM"—PRIVATE DINING-ROOM.

INTERIOR VIEWS, NEW AUDITORIUM ANNEX, CHICAGO.

HOLABIRD & ROCHE, ARCHITECTS.

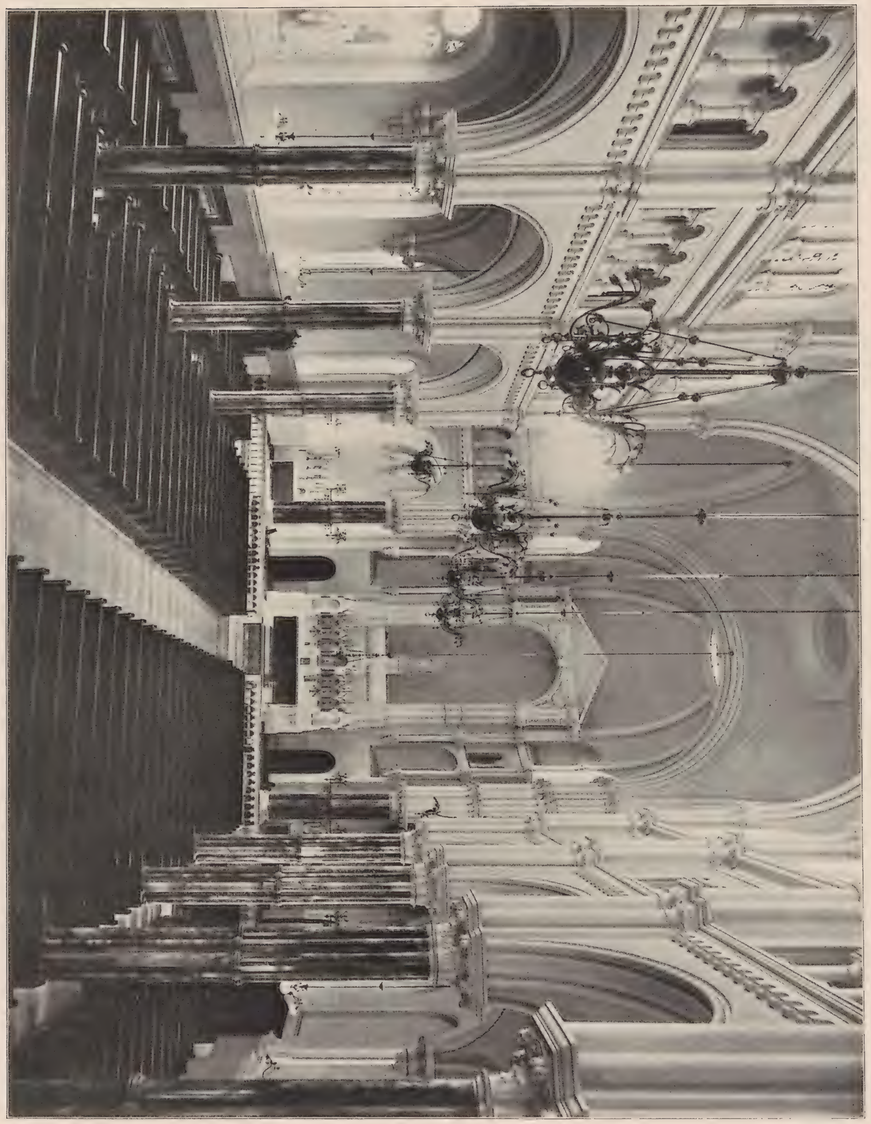

CHURCH OF OUR LADY OF MERCY, PHILADELPHIA, PENNSYLVANIA.

E. F. DURANG, ARCHITECT.

Negative by R. W. Williams, Chicago.

INLAND ARCHITECT PRESS.

ST. PETER'S EPISCOPAL CHURCH, GERMANTOWN, PA.

Negative by Fred L. Fales, Waltham, Mass.

INLAND ARCHITECT PRESS.

RESIDENCE, BROOKLINE, MASS.

J. A. SCHWEINFURTH, ARCHITECT, BOSTON, MASS.

Negative by R. W. Williams, Chicago.

INLAND ARCHITECT PRESS.

RESIDENCE OF R. A. WHITE, MELROSE, PA.

ALBERT YARNELL, ARCHITECT, PHILADELPHIA.

Negative by R. W. Williams, Chicago.

Inland Architect Press.

THE POMPEIIAN ROOM, NEW AUDITORIUM ANNEX, CHICAGO.

Holabird & Roche, Architects.

Negative by Fred L. Fales, Waltham, Mass.

INLAND ARCHITECT PRESS.

POLICE STATION, BROOKLINE, MASS.

J. A. SCHWEINFURTH, ARCHITECT, BOSTON.

Negative by Fred L. Fales, Waltham, Mass.

INLAND ARCHITECT PRESS.

ROXBURY HIGH SCHOOL, BOSTON, MASS.

ANDREWS, JACQUES & RANTOUL, ARCHITECTS.

Negative by R. W. Williams, Chicago. INLAND ARCHITECT PRESS.

MANTEL, "ENGLISH ROOM," PRIVATE DINING-ROOM, NEW AUDITORIUM ANNEX, CHICAGO.

HOLABIRD & ROCHE, ARCHITECTS.

Negative by R. W. Williams, Chicago.

Inland Architect Press.

THE FOUNTAIN, POMPEIIAN ROOM, NEW AUDITORIUM ANNEX, CHICAGO.

Holabird & Roche, Architects.

THE INLAND ARCHITECT AND NEWS RECORD

Vol. XL. JANUARY, 1903. No. 6

A Monthly Journal Devoted to

ARCHITECTURE,

CONSTRUCTION, DECORATION AND FURNISHING

IN THE WEST.

PUBLISHED BY THE INLAND PUBLISHING CO.,
609-610 MANHATTAN BUILDING, CHICAGO, ILL.

L. MULLER, Jr., Manager. ROBERT CRAIK McLEAN, Editor.

SPECIAL CONTRIBUTORS:

C. HOWARD WALKER.	D. H. BURNHAM,	W. L. B. JENNEY,
HENRY VAN BRUNT,	P. B. WIGHT,	IRVING K. POND,
LOUIS H. SULLIVAN,	ALLEN B. POND,	J. R. WILLETT,
WILLIAM S. MACHARG.	C. E. ILLSLEY.	F. W. FITZPATRICK.

TERMS: Regular number, $5 a year; Photogravure edition, $10 a year. Single copies, Regular number, 50c.; Photogravure edition (including 7 photogravures), $1. Advance payment required.

The columns and illustration pages of THE INLAND ARCHITECT are open to all alike, merit and availability only determining what shall be published. Contributions appropriate to its pages are always desired.

AMERICAN INSTITUTE OF ARCHITECTS.

OFFICERS FOR 1900:

PRESIDENT	*CHARLES F. MCKIM, New York, N. Y.
SECRETARY AND TREASURER	*GLENN BROWN, Washington, D. C.
FIRST VICE-PRESIDENT .	FRANK MILES DAY, Philadelphia, Pa.
SECOND VICE-PRESIDENT .	ALFRED STONE, Providence, R. I.
AUDITOR FOR TWO YEARS .	W. G. PRESTON, Boston, Mass.
AUDITOR FOR ONE YEAR .	S. A. TREAT, Chicago, Ill.

BOARD OF DIRECTORS:

For three years.—Walter Cook, New York, N. Y.; William S. Eames, St. Louis, Mo.; Cass Gilbert, St. Paul, Minn.

For two years.—J. M. Carrère, New York city; James W. McLaughlin, Cincinnati, Ohio; R. Clipson Sturgis, Boston, Mass.

For one year.—Henry Van Brunt, Kansas City, Mo.; James B. Hill, Washington, D. C.; Normand S. Patton, Chicago, Ill.

*Executive Committee.

STANDING COMMITTEES FOR 1900:

Judiciary Committee.—Wm. S. Eames, St. Louis, Mo.; James G. Hill, Washington, D. C.; Arthur G. Everett, Boston, Mass.

House and Library Committee.—Robert Stead, Washington, D. C.; Glenn Brown, Washington, D. C.; Frank Miles Day, Philadelphia, Pa.

Committee on Contracts and Lien Laws.—Alfred Stone, Providence, R. I.; W. B. Mundie, Chicago, Ill.; Arthur G. Everett, Boston, Mass.

Committee on Applied Arts and Sciences.—W. G. Preston, Boston, Mass.; F. E. Kidder, Denver, Colo.; Frederick Baumann, Chicago, Ill.

Committee on Foreign Correspondence.—Glenn Brown, Washington, D. C.; J. G. Howard, New York city; R. W. Gibson, New York city.

Legislative Committee on Government Architecture.—George B. Post, chairman. Committee—Bruce Price, New York city; John M. Carrère, New York city; James G. Hill, Washington; Alfred Stone, Providence. Alternates—Edward H. Kendall, New York city; E. B. Green, Buffalo, N. Y.; D. H. Burnham, Chicago, Ill.; Robert Stead, Washington.

NEXT CONVENTION AT CLEVELAND, OHIO.

THE ARCHITECTURAL LEAGUE OF AMERICA.

OFFICERS FOR 1901-1902.

PRESIDENT	FREDERICK S. LAMB, New York.
VICE-PRESIDENT	C. H. BLACKALL, Boston, Mass.
TREASURER	JULIUS F. HARDER, New York.
CORRESPONDING SECRETARY . . .	H. K. BUSH-BROWN, New York.
RECORDING SECRETARY	W. E. STONE, New York.
ADDITIONAL MEMBERS EXECUTIVE BOARD	F. CROWNINSHIELD, New York. D. K. BOYD, Philadelphia.

NEXT CONVENTION AT ST. LOUIS, MO., OCTOBER 12-13, 1903.

A City Architect Appointment Controversy.

The city of Milwaukee, Wisconsin, has been in the throes of a controversy between the mayor, who wishes to appoint a city architect, and the architectural profession there, which wishes the designs for schools and other municipal buildings to be furnished by competition. The mayor claims that the best architects do not compete, and the architects that it places the work too much under the control of the unscrupulous when in the hands of a political appointee. The situation is common, almost universal. City buildings should represent the best architectural talent of the city. It is rare that an architect of high attainments can be induced to take the office of city architect, both for financial and other reasons, and it is the low estimate placed upon architectural skill by the general public and the seeking to obtain architectural skill for nothing that defeats the prime object of a competition. Let the public first understand that good architecture means good buildings in design and plan. That architectural talent, like all other desirable things, should be paid for and then adopt the lesser of the two evils, a politically appointed architect on an inadequate salary or a competition, and adopt a competitive system that will be adequately paid for and intelligently adjudicated, with a general saving of cost to the city.

Causes of Lack of Interest in Chapter Meetings.

The spreading influence of the American Institute of Architects is gradually drawing the attention of architects generally to the desirability of local professional association. As the rules of the Institute demand that the membership should generally come through local associations, the organization and reorganization of such is reported from many points. But the organization of a body of architects is one thing and its continued activity and increase in membership and usefulness is another. The organization in the State of Minnesota is a case in point. An association was in existence there, but with no connection with the Institute or other body, before the organization of the Western Association of Architects in 1884. Since that time a local body has been organized three times. The reason seems to largely lie in the lack of professional enthusiasm. Practically it is because the members will not recognize the great benefits to be derived from association and give the necessary proportion of their time and talents to the association meetings. Not in mere attendance and the payment of the small sums that are required for maintenance, but in seeking to make each meeting valuable, interesting and even entertaining to each member who attends. They should contain instructive matter from the active experience of practitioners. There should be music for those who enjoy harmony, humor should not be overlooked, for meetings should never be made formal, and a general air of helpful and fraternal good fellowship should prevail. The lack of these qualities in the meetings is the fundamental cause of small memberships and small attendance upon Chapter meetings, and no organization can possibly succeed that does not have among its members those who are self-sacrificing enough to devote time and thought to the success of the association meetings.

MODERN CONSTRUCTIVE METHODS.

BY E. C. SHANKLAND, C. E.

THE most interesting portion of a building to the structural engineer is the foundation. In Chicago the very compressible soil made unusual care necessary in designing the foundations of the high office buildings.

The soil of Chicago is made ground to a depth of twelve to fourteen feet, then a layer of hard clay six to ten feet thick is struck, and upon this layer is placed the spread foundations. Below this layer is a soft clay extending down to a shale formation overlaying the rock, the latter being found at a depth of eighty to one hundred feet.

The first high buildings were put on spread or floating foundations made of steel beams imbedded in concrete. Each foundation was made of such a size that the load coming on the clay would not exceed three thousand to thirty-five hundred pounds per square foot. This often necessitated putting two or more columns on one foundation.

In figuring load on clay, only dead weight of building is taken into account, as it was found impossible to get a uniform settlement when live load was carried into the footings.

In one large and costly building in Chicago, built some years ago after plans by a celebrated Boston architect, the live load was considered in designing the foundations.

The result is that the walls of the building settled very much more than the foundations carrying the interior columns, and the floors are six or eight inches higher at the center than around the outside. In consequence extra men are stationed on the floors to help the truckmen push the trucks up the incline.

The settlement of the buildings put on spread foundations is from eight to twenty inches. This is allowed for by putting up the foundations when work is begun.

The settlement curves of the Masonic Temple, three hundred feet high, are shown herewith.

The first vertical row of figures on the left give the number of the column, the next row the inches of settlement, and the other spaces on the right show the years covered by the observations. You will note that the settlement is not great for about two months after foundations were put in place, but as the building went up and the loads on the footings increased the curve becomes very much sharper. You will also note that the greatest variation in the settlement of the columns occurred at the start when the difference in loads was greater; afterward the settlement becomes almost uniform, changing at northeast corner when the smoke-stack at column nineteen was increased in height, causing an increased settlement at this point.

No settlement has taken place in the past five months, as shown by the horizontal lines. It is, however, questionable whether any of the very high buildings ever entirely stop owing to the effect of the wind against them. The prevailing winds in Chicago come from the west and southwest, and the higher buildings when they lean at all, invariably lean east.

The Great Northern theater, hotel and office building was erected east of the Great Northern Hotel, built several years before. The hotel has a court in the center of the east side and the theater of the new building adjoining the court on the west.

Heavy fire-walls separate it from the office and hotel portions. These walls, each weighing, with the floor loads, sixty thousand pounds per lineal foot, meet the east wall of the present Great Northern Hotel at right angles. This east wall had been originally regarded as a party wall, and its footing had been constructed strong enough to carry a floor load from each side. The end of the theater wall where it meets the east wall could not rest on the footing of the latter, which projects nine feet six inches, as it would overload the footing, being only on one side, besides being too great a load. The old building had also practically stopped settling, and the new one would probably settle ten to twelve inches. The floor load, however, from the east side had never been put upon this footing, and in addition it was deemed safe to load it somewhat higher than it had been originally, as the east wall, fourteen stories high, had been resting upon it for four years. Plate girders were placed lengthwise in the theater wall, with their ends projecting through the old wall, and resting on 36-ton hydraulic jack-screws, which in turn were supported by I-beams lying on the footing and parallel to the old wall. The plate girders were of such a length, and so located, as to transfer to the old footing the desired weight. The screws were raised to their full height, so that they could be lowered fourteen inches if necessary. As the new building settled these screws were run down at regular intervals, until the settlement stopped. Levels are being taken on the building. After the settlement has entirely ceased, the screws will be surrounded with concrete and left.

A rather curious example of foundation exists at Duluth. The Duluth General Electric Company very recently installed a 1000-K. W. dynamo, and the vibration caused by it affected buildings five hundred feet away. The vibration of a 5-story building over five hundred feet away was very perceptible. The building is close to the bay, and I found on examination that the ground is swamp and made ground down to about sixteen feet, where a hard stratum is found. This made ground is filled with water and transmits vibrations in waves.

The buildings are built on piles driven into the hard ground, but the top sixteen feet are entirely unsupported laterally. One building, however, also about five hundred feet away, was found to have no vibration whatever, and it developed that when the foundations of this building were put in the whole area was excavated down to the hard ground, and filled with sand to the top of the ground.

In order to avoid the excessive and long-continued settlement due to spread foundations, piles were used, and latterly concrete caissons, going down to the shale overlaying the rock or going down to the rock itself, are supplanting both. When it is not found feasible to go clear to the rock the caissons are belled out at the bottom, generally to twice the diameter of the caisson itself; that is, a six-foot caisson is belled out to a diameter of twelve feet on the bottom and the angle of the slope of the bell is about thirty degrees with the vertical. When the caissons go to rock the belling is not necessary. The caissons are made by digging down from four to six feet, just as a well is dug, and then lining up the shaft with wooden lagging, the strips vertical, held in place by iron hoops made adjustable. Then another section is excavated and lagging put in, and so on down. When bottom is reached concrete is put in, and lagging removed one section at a time until hole is filled.

One building, now being erected, will rest on about ninety caissons from seven to ten feet in diameter, carried down to rock, which is from one hundred to one hundred and four feet below surface of ground.

A large State street department store, now occupying a 6-story building, has just started to tear down the old building, and erect a 16-story building in its place. The foundations for the new building, however, are all now in place, and have been put in during the past three months. Over sixty concrete caissons, from sixty to eighty feet deep, have been built without disturbing the old building, and without the knowledge of the thousands of shoppers who daily filled all the floors above. In some cases it was necessary to shore up the old building, and take out an old basement pier and put a caisson directly under it. At night the material excavated during the day was taken up to the street through an opening in the sidewalk, and hauled away in wagons.

Concrete caissons and piles are often used in foundations of same buildings.

There is no settlement, when caissons are used, beyond that due to the shrinkage of the material while being put in place.

The use of concrete, either in large masses or reinforced by steel, has made great strides in the past few years and continues to grow in favor.

The drainage canal used it in immense quantities and in some cases in a very bold manner.

After foundations next in importance comes the fireproofing of the steel frame of the building. Concrete floor systems are now being exploited in great variety. Some of the systems have merit, but all of them make too great claims.

A concrete slab three or four inches thick, even if reinforced with steel in some form or other, should not be used in a very much greater span than we now use for steel beams with hollow tile arches between. It has been gravely told me by a concrete sales-agent that in case of 2 by 15 inch beams, say 7-foot span, it would be perfectly safe not only to deduct the difference in weight of floor between the 3-inch concrete slab they proposed to use and the weight of a 15-inch hollow tile arch, but in addition the

---

* Paper read before the Ontario Association of Architects, at Toronto, Canada, January 14, 1903.

section can be reduced twenty-five per cent on account of the help the concrete gives the steel. In other cases they state you can, with concrete, use 17 to 25-foot spans, and save all the steel thereby taken out.

One question, however, they decline to answer. Ask them, instead of telling the vertical load it will support without collapsing, to turn their slab of concrete three or four inches thick and 17 to 25-foot span, on edge, and then load it. They invariably decline to test it this way. Now, in a 20 or 30-story office building lateral stiffness in the floors is more essential than carrying capacity. A thin slab of concrete laid on top of twelve or fifteen beams can not, by the very nature of things, add to the lateral support of those beams. But a 12 or 15-inch hollow tile arch laid in between the beams does make a stiff floor.

Experiments as yet have not demonstrated that concrete floors are fireproof, as compared with hollow tile which already has been burned.

While I have faith in concrete and believe it has great possibilities which will be demonstrated in the future, yet I think that

Levels Showing Settlement of Masonic Temple
Chicago.

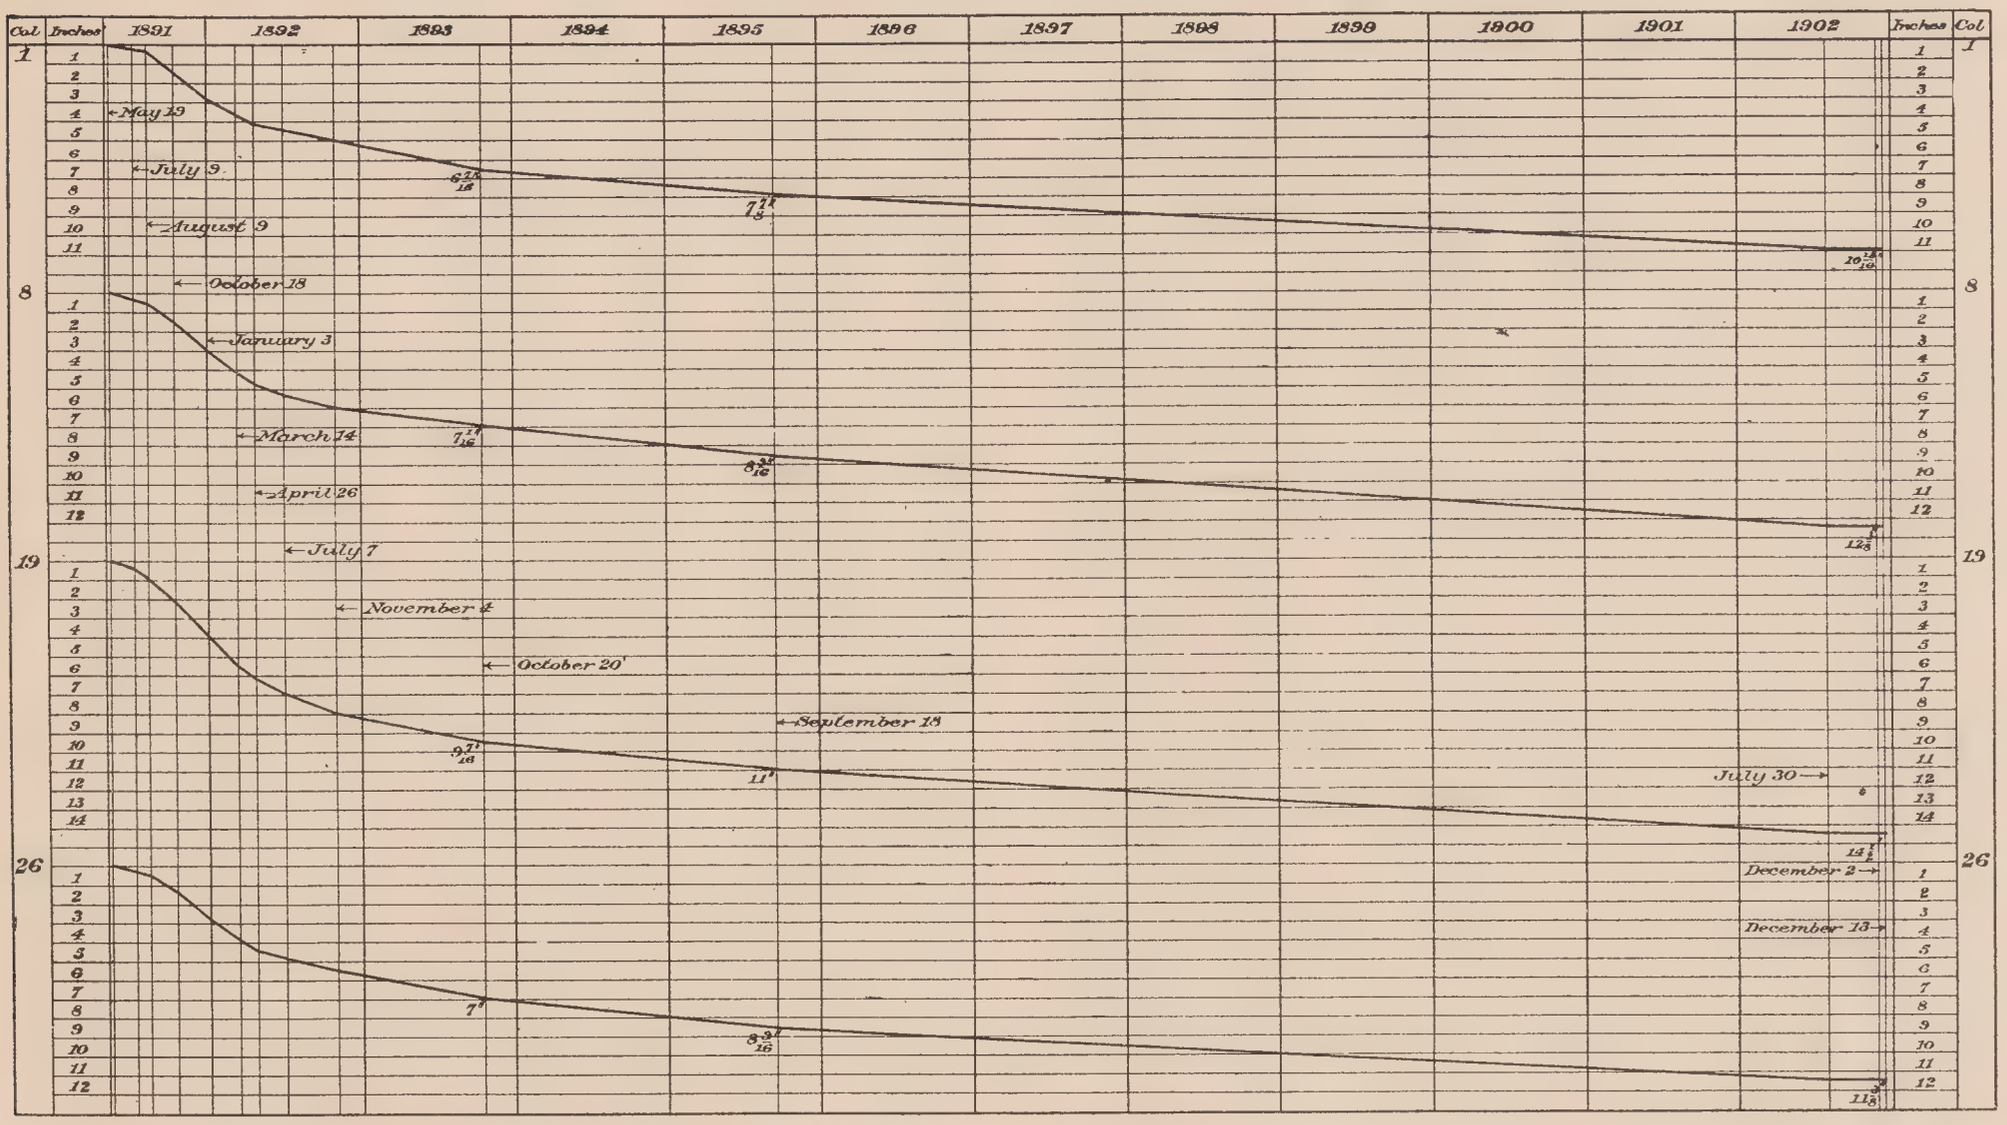

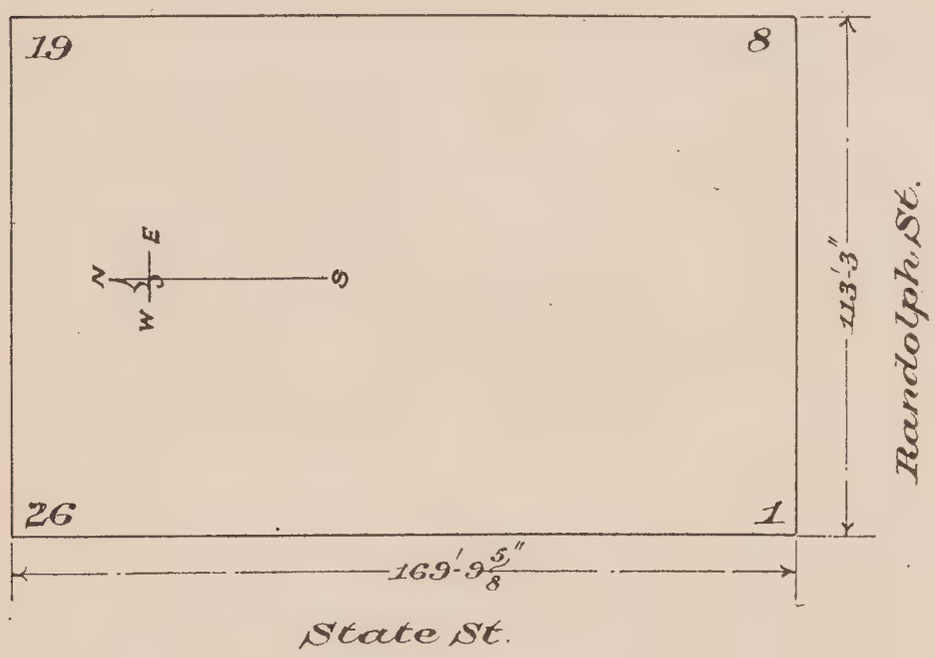

now, in order to compete with hollow tile, its advocates are making claims which can not be substantiated, and in the future they will have to be more conservative, not only in their statements but in their construction, in order to succeed.

Recent failures, one — in Jackson, Michigan — where the falling of the floors pulled down the outside walls; and another of four floors which collapsed in a $500,000 apartment building in Chicago, will undoubtedly prove beneficial in the lessons they teach. Many other failures in concrete floor construction have occurred in the past few years, but these are the most recent.

Another thing, a building is not necessarily fireproof because it has steel floor-beams and columns. Naked steel or cast-iron is not fireproof. Wood is far preferable, for if it is of sufficient size it chars on the outside, and the charring acts as a protection. Every bit of structural steel must be covered with a fire-resisting material in order to be fireproof.

The last engineering papers give an account of destruction by fire of two English spinning-mills, one resulting in the death of nine persons and the injury of a large number. The report sums up both disasters as due to the breaking of the cast-iron posts, but the same report says the cast-iron posts were left bare. In the absence of further information it is only reasonable to suppose that the true cause is that these columns were not fireproofed.

Another and possibly a greater danger than fire is rust. Examination of steel buildings, made recently, show that the danger is not as great as some alarmists would have us believe, yet it exists.

In a building built in Buffalo in 1895 all the outside columns were filled with cement grout after the brick and fireproofing had been put around them, thus making the pier a solid monolith with a steel core. This is now being generally followed in the best buildings.

FLOOR LOADS.—The building ordinances of the different cities cover all cases so completely that very little is to be said. New York and Chicago both demand one hundred pounds per square foot for each floor of an office building, or one to accommodate public gatherings.

WIND BRACING.—A great deal has been written about wind bracing in high buildings, and a great many methods of taking care of wind pressure have been brought forward.

Diagonal rods and portal bracing have been tried, but interfere too much with the floor space, and the former especially can not be carried out and made a perfect system.

In the Fisher building, Chicago, erected in 1894, the wind was taken care of on the table-leg principle. Around the outside of the building at every floor the spandrel sections were made of plate girders, thirty inches deep, run between the columns and riveted to them. Each floor was supposed to transmit pressure to all the columns of the building in that story, and so on to the ground.*

*Mr. Shankland's paper was illustrated by drawings and photographs, and samples of concrete, etc. The former, of the Fisher building and others, being familiar to the readers of THE INLAND ARCHITECT, are not reproduced.

THE RELATION OF THE ARCHITECT AND ENGINEER TO THE DESIGN AND ERECTION OF GOVERNMENT BUILDINGS.*

BY JOHN STEPHEN SEWELL, CAPTAIN U. S. E.

Probably every one here present will accept it as axiomatic that the design and erection of Government buildings should proceed according to some well-studied and businesslike system. This should be broad enough to cover the reasonable requirements of every individual case, yet sufficiently well defined to insure always the maximum economy and efficiency; it should also insure the placing of both responsibility and credit for all work where they properly belong.

That there is no existing system of general application is amply demonstrated by the history of Government buildings everywhere, both completed and building. Certain departments of the Government which have considerable building work to do, proceed in a more or less systematic manner; yet not one of them adheres always to its own general methods, and certainly no two of them handle the work in even approximately similar ways. Possibly one reason why the problem has not been definitely solved before this is that it is capable of more than one solution, and is, to that extent, indeterminate. However, there must be some one solution that is better than any other, and there seems to be abundant evidence that it is yet to be found. There is much complaint on the score of artistic merit, or structural excellence, or economical execution in many of the buildings erected under any of the existing systems; while most of those which escape adverse criticism have been handled in some special way, not susceptible of general application.

In what follows, it is not claimed that this best solution is necessarily to be found; it is only an indication of lines along which the writer believes a system could be developed, capable of handling all cases likely to arise in ordinary practice, with reasonable satisfaction to all concerned.

Inasmuch as both architects and engineers have much to do with the design and erection of modern buildings, and neither can do entirely without the other, it would seem to be a matter of prime importance that they be definitely settled in their proper relative positions, in the beginning. This is a matter of more importance in Government work than in private work, because of its greater extent under one ownership. The writer's plan, without elaboration of details, is simply this: the engineer should be a Government official, with authority to disburse funds and make contracts; the architect should be in private practice. The architect, selected in some proper way, should, in general, be responsible for the design of the building, and the Government, through its own engineers, should erect it. If the Government could develop a corps of salaried architects, with sufficient artistic ability, it would be manifest economy to do so; but the very nature of the case seems to make this impossible, and there is undoubtedly a very general sentiment that a "plan factory" is not conducive to the highest artistic excellence in building design. With this sentiment, the writer is in thorough accord so far as artistic features are concerned, though he believes that a well-conducted "plan factory" is an excellent thing when it comes to structural and other engineering work; so that he would always advocate the retention of a good architect in private practice, for the design of a Government building. He would, for all important work, limit the selection to architects of well-proven ability. But on less important works, the competitions, or methods of selection, should be so devised as to give the younger men a chance to win if they can. It is not necessary to go into details on this point, since this paper is merely an expression of opinion on the part of an individual, and not a probable basis for official action.

Now, coming to engineers, there is no doubt that, by a proper system of selection and tenure of office, the Government could get an abundance of competent engineers at moderate salaries, to look after the execution of its building work. These men could easily be trained so as to do away entirely with the general contractor, and even with many of the sub-contractors, at a financial profit to the Government, and with considerable improvement in the standard of work. They would also be in a position to standardize many of the features of building design, which are now sadly in need of it. For instance, among the many so-called systems of fireproofing on the market, some leave little to be desired, some are very good, some fair, and many are wholly bad. A corps of building constructors, employed by the Government, would be in a position to definitely settle which were wheat and which were chaff, and draw the line between them. Certain column sections are structurally good, others structurally bad; under present conditions, quite a percentage of the latter find their way into Government buildings. The same is true of other details in all lines of building work, and this could be corrected by a construction corps such as that herein suggested. Above all, such searching inspection could be provided, that the standard of workmanship would be materially raised. Contractors would be forced to learn that good work can be executed as cheaply as bad, and it is not too much to claim that the general elevation of the standard on Government buildings would exercise a similar and much-needed influence on private work. A corps of building constructors, all well-trained and competent engineers, could, therefore, determine the best types for the various structural features of different classes of buildings; they could standardize specifications for both workmanship and materials; they could prepare the engineering plans themselves, if that proved advisable, or, if not, they would at least, by the results of their investigations with the resources at their command, greatly simplify the architect's work on all but the purely artistic parts of the design. They would make all the contracts, control the various contractors, and be responsible that the approved design was properly and economically executed. But the architect's duties should so far overlap those of the constructing engineer, that it should be his province to consult with the engineer on all points affecting the artistic value of the building, and on these points his authority should be superior to that of the engineer, except in those cases that occasionally occur, where an effect is mistakenly sought at the expense of sound construction. In any event, the engineer, if he happens to take a narrow view of the artistic, should not be allowed to spoil the design, any more than a general contractor, in a like position. * * *

Naturally, a good many questions of detail will at once be raised in considering the probable workings of any proposed new system. Possibly it may be worth while to raise one or two now, and attempt to answer them.

It may be asked, if this building bureau personnel is made up entirely of engineers, who will decide between the various architects in a competition? Who will pass upon the artistic merits of the designs? There should be a board of probably three eminent architects in private practice, retained to advise the constructing bureau in such matters, and their decision on artistic questions should be final. Of course, no one directly or indirectly interested in the composition should be eligible for membership on this board. The building once awarded to an architect, or firm of architects, they should be left entirely untrammeled in their work; the writer thinks this is more certain to follow if the constructing bureau is avowedly not composed of architectural experts. A little advice from the board of consulting architects should be a sufficient check on the design, if any is needed.

Inasmuch as architects, like the rest of mankind, are dependent for their existence upon a certain amount of the things that only money can buy, the question of compensation may also be raised. It is assumed that if the architect prepares all the plans and specifications, the usual percentage for such work would be a proper commission; it ought to be more liberal under the system herein outlined than any other, because so much of the engineering and structural design would be covered by the standard details and specifications of the constructing bureau. Fewer drawings would be required, and the specifications would demand not more than one-fourth of the usual amount of attention. * * *

In case the constructing bureau did away entirely with general contractors, as the writer thinks it should, there would be a very decided economy in having the drawings for the steam, sanitary and electrical work, and also for foundations, structural features and fireproofing, made by its own draftsmen; in this case, the drawings could be made to serve at once as a basis for contracts for materials, as well as to interpret the design. The writer thinks this might be arranged with justice to all concerned, by having the architect supervise the preparation of these drawings, and paying him the full commission, less only the usual cost of such drawings to the architect himself.

In any event, in Government work, the money must be expended according to law and regulations, and every penny accounted for with a rigidity almost unknown in private work. Contracts must be made in accordance with a mass of statutes, rules and decisions that bewilder one not brought up among them.

Finally, he would like to say that he has not, in intimating that improvement is possible in the existing order of things, meant to criticize any man, or any class of men, engaged upon Government buildings; he believes that most of them are zealous and capable, which only confirms him in the belief that they could produce better results, if organized under a better system.

[Many and possibly all of the features suggested in this paper are now and have for years been component parts of the Supervising Architect's office. Engineers, structural, mechanical, electrical, etc., any one of which is probably the superior for the work required of any to be found in the engineers' corps. As for developing a corps of salaried architects, that is just what the personnel of the Supervising Architect's office is to-day, and they are fully equal in ability and experience to those in private practice. The system of carrying out the work certainly could not be improved upon by any army engineer that we have heard of, as, at the present time, the men who administrate affairs under Secretary Shaw are trained business men, and the conduct of the Supervising Architect's office does not require any more tinkering than is always going on in the direction of more officered service. It has always been an illusion of the army engineer that he knew something more than any one else about the construction of Government buildings. The present paper is evidently a last attempt to insinuate the engineers' corps into the Government's architectural affairs, but the Supervising Architect's office has been so long in capable hands, and its work so successful, that there is little danger of any one taking the suggestions of this engineer for an architectural and engineering bureau seriously. It seems rather bad form for one branch of the service to seek to belittle another, but the army engineer only follows precedent in seeing nothing good outside of his own corps.— EDITOR.]

* Paper read before the thirty-sixth convention of the American Institute of Architects, at Washington, December 11, 1902.

THE EFFECTS OF WIND PRESSURE ON STRUCTURES.

BY ROBERT M. NEILSON.

[From the *Engineering Magazine* for January, 1903.]

As Mr. Neilson himself indicates in his opening paragraph, he is considering the subject of wind pressure on engineering constructions under conditions existing or to be expected in the British Isles. The fact, however, that his discussion is concerned with the general phenomena of wind motion and with the methods of investigation and deduction of formulæ, rather than with the determination of any absolute factors, gives the paper wide application. It is a comprehensive review of the best work that has been done in the field and a clear statement of some not very generally known facts.—THE EDITORS.

IT was the Tay Bridge disaster of 1879, more than anything else, that caused engineers in Great Britain to consider the effect of wind pressure on bridges and other structures. Previous to that event the consideration given to the subject was of a comparatively trifling nature. In fact, about the time of the introduction of iron-girder bridges it was thought by many that, if a bridge were strong enough to carry its own weight and its traveling load, it would be absurd to suppose that any wind pressure could rupture or overturn it. No attempt was therefore made in many cases to estimate the stresses caused by wind pressure or to provide for them in the design of the structure. Of course, it should be borne in mind that for the same factors of safety metal bridges were considerably heavier then than they are now.

After the Tay Bridge disaster, a committee was appointed by the Board of Trade to advise what provision should be made in future with regard to wind pressure. With the scanty data available at the time it is not surprising that some of the recommendations of this committee have not been supported by recent observations. One recommendation made by the committee and adopted by the Board of Trade was that structures in exposed places should be built to withstand wind pressures of 56 pounds per square foot, allowing a factor of safety for rupture of 4 for iron or steel and a factor of safety of 2 for overturning against the action of gravity. The fact does not seem then to have been much appreciated (although it was not unknown) that the action of the wind on large areas is very different from that on small areas. Pressures of more than 50 pounds per square foot have been indicated by anemometers or small registering gauges many times in Great Britain. Rankine gives 55 pounds per square foot as the greatest pressure observed in Britain, this being observed by Dr. Nichol of Glasgow Observatory. Fidler, however, mentions 65 pounds per square foot as having been registered on a gauge erected by the engineers of the Forth Bridge and, according to Bender, 71 pounds per square foot was recorded at Liverpool on September 27, 1875. We have no reason, however, for assuming that the average pressure on large areas is the same as on small. We have no record of a pressure approaching 56 pounds per square foot being actually measured as being exerted over a large area such as 100 square feet; and various observations made by different individuals have proved to us that in the observations in question the average pressure on a large area was different from that on a small one. Experiments were made at the Forth Bridge by exposing two gauges — one large and one small — to the same wind. The pressure per square foot exerted on the larger gauge, which measured 15 feet by 20 feet, was only from sixty to seventy per cent of that exerted per square foot on the smaller gauge, which was only 1½ square feet in area. There are many bridges and other structures now existing in different parts of Britain which were erected at a time when it was not the custom to allow much or anything for wind pressure and which could not withstand a pressure of anything like 56 pounds per square foot.

Sir J. Wolfe Barry made experiments on wind pressures on the Tower Bridge. A bascule of this bridge furnishes about 5,000 square feet of area and Sir J. Wolfe Barry calculated from the power required by the actuating engines, that, while small anemometers on the fixed parts of the bridge adjoining the bascules registered 6 pounds to 9 pounds per square foot, the wind pressure on the bascules was only 1 pound to 1½ pounds per square foot.*

That wind pressure per unit area decreases with the extent of the surface was noted in the eighteenth century by several experimenters, including De Borda and Hutton. The results got by De Borda in one set of experiments are given in the following table:

Surface in square inches.	Intensity of pressure.
9	100
16	109
36	119
81	129

There are two reasons why the average intensity of pressure on a large area should not be so great as on a small area. In the first place, the average velocity of wind is very much exceeded by local currents in the same wind. One of these local currents, striking the full extent of a small area, will cause a high pressure, while it will make little difference to the average pressure on a large area. In the second place, the flow of air is very much upset in the case of a large surface by the lateral flow of the air from the front of the surface, and the velocity of the air for a considerable distance in front of the large surface (or rather, the component of this velocity at right angles to the surface) is probably much reduced.

Mr. T. Seyrig has tabulated the particulars of a number of railway cars and wagons of the Southern Railway of France which have been overturned by the wind. From these particulars it results that the pressure exerted by the wind must have been from 26 to 34 pounds per square foot. It is noteworthy that in every case recorded there were other vehicles in the same train which would have required higher pressures to upset them and which were not upset. There were also wagons which were thrown off the rails and not upset; but, as the wind pressure to accomplish this can not be satisfactorily ascertained, these cases need not be considered. Professor Gaudard also has given particulars of the upsetting of trains in France — in this case between Narbonne and Perpignan — from which it appears that the pressures were from 30 to 50 pounds per square foot. It should be noted that this is a particularly stormy locality.

We have, therefore, fair grounds for the belief that the wind pressure on large areas need never in Britain be expected to approach 56 pounds per square foot. Constructing a bridge or other large structure to withstand a wind pressure of 56 pounds per square foot with the usual factors of safety, seems therefore to be incurring an unnecessary expenditure. If a structure is arranged to withstand an overturning moment due to a wind pressure of 56 pounds per square foot and has a factor of safety of 2, it will require a wind pressure of 112 pounds per square foot to overturn it. Now the maximum ever experienced in Great Britain is probably well within a third of this. It must also be noted that a mere puff of wind will not overturn a massive structure. In the instance just given a momentary pressure of even 112 pounds would in most cases not suffice; a continuous blast would be required to overcome the inertia.

The allowance for 56 pounds per square foot wind pressure is a serious matter with large bridges. Sir Benjamin Baker has calculated that, in some of the members of the Forth Bridge, the maximum forces due to dead load, live load, and wind pressure are as follows:

Dead load	2282 tons
Live load	1022 tons
Wind	2920 tons

It will be seen that the force allowed for wind pressure almost equals the dead load and live load put together and it must be remembered that the provision for wind pressure is responsible for some of the dead load. Sir J. Wolfe Barry, in his address to G section of the British Association in 1898, said:

> It is difficult to imagine the amount of money which has been wasted in unnecessary provision against wind strains of 56 pounds per square foot on large areas in consequence of this hurried generalization from insufficient data. I know something of what the provision for 56 pounds on the square foot for wind cost at the Tower Bridge, and I do not wish to mention it; but if the public had been told that the dictum of experts arrived at, however hastily, in 1880, was to be set aside in the construction of that bridge all confidence would have been beforehand destroyed in it and I suppose no committee of Parliament would have passed the Act.

Fidler considers that wind which will exert a pressure for overturning carriages of 30 pounds per square foot will record on a dynamometer a pressure of 40 to 75 pounds per square foot. Anglin is of opinion that for large areas it is sufficient to assume a maximum pressure of 45 pounds per square foot over the whole surface. Still it can not be said that we have reliable information as to how much to allow for wind pressure on bridges and buildings. Much time and labor have been spent on experiments, but knowledge useful to engineers is still far from complete. Since the days of Sir Isaac Newton there have been many experimenters on wind pressure. The French general Didion did much in this way, and among others may be mentioned De Borda, Robins, Rouse, Vince, Edgeworth, Rumford, Piobert, Thibault and Hutton. As however different experimenters used different apparatus, there is a great want of uniformity in the results obtained. I may here give a few of the many formulæ that have been proposed at one time or another for calculating the wind pressure from the velocity of the wind.

Rouse's formula is

$$p = \frac{V^2}{200}$$

where p denotes pressure in pounds per square foot and V velocity in miles per hour. This formula was adopted by Smeaton (it is sometimes called Smeaton's formula) and has been used to a considerable extent.

Didion's formula in British units is

$$p = 0.0036\ V^2$$

the letters representing the same as in Rouse's formula. Didion's formula gives considerably lower pressures than Rouse's.

A formula of modern date is that of Mr. W. H. Dines who based it on the result of lengthy experiments carried out at Hersham in Surrey. Dines' formula is

$$p = V^2 \times 0.003$$

the letters representing the same as in Rouse's and Didion's formulæ. Dines' formula gives slightly lower results than Didion's.

Hawksley's formula is

$$p = \frac{v^2}{20}$$

where p denotes pressure in pounds per square foot and v velocity in feet per second. This formula is based on scientific reasoning, but the assumptions made are quite unwarranted. This formula gives higher pressures than any of the others here cited. The results of the four formulæ are compared in Table

* See the *Engineering Magazine*, November, 1898, page 289.

III. As, however, the pressure on a large area has been shown to be different from that on a small area for the same wind velocity, these formulæ are of little use for general application. Besides the question of total pressure it is important to know how the pressure is distributed over a structure. It seems to be evident from numerous experiments and observations that, when a plane surface is inclined to the wind, the pressure is greater at the forward than at the rear end. That is to say, if A, Fig. 1, represents the direction of the wind, and B C is a plane exposed to the wind pressure, the normal pressure exerted on the plane at B as represented by the arrow *b* is greater than the normal pressure exerted on the plane at C as represented by the arrow *c*. If therefore the plane be pivoted at its center D (the pivot being normal to the paper) it will tend to rotate in the direction of the arrow *e*, till it lies at right angles to the direction of flow of the wind. This explains why a throttle valve pivoted about a diameter in a steam pipe tends to close with a flow of steam.

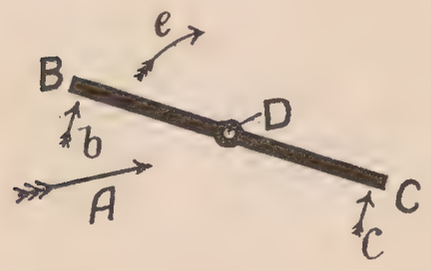

FIG. 1.

Effect of wind pressure on inclined plane.

Some interesting experiments were made about seven or eight years ago by Mr. J. O. V. Irminger, engineer and manager of the municipal gasworks at Copenhagen, and Mr. H. C. Vogt of the same city. The draft from a chimney 100 feet high was used to draw air through a duct measuring about 9 inches by 4½ inches. This is shown in section diagrammatically in Fig. 2. A plate P 1⅝ inches broad was extended across this duct and was so fitted that its inclination could be altered at will. This plate although flat was hollow and its interior, by means of a trunnion, was put into communication with one leg of a water gauge W, the other leg of which, by means of the tube T, communicated with the interior of the duct. The plate P was provided with several holes. Only one hole was left open at a time, the others being stopped, and the pressure inside the hollow plate was assumed to be equal to the pressure exerted on the plate in the region of the hole. The water gauge indicated the difference between this pressure and the pressure in the duct. The experiments showed not only that the pressure near the forward edge of the windward side of the plate when the latter was inclined was greater than that near the rear edge (the fact which has just been mentioned with reference to Fig. 1), but also that the normal pressure near the forward edge was considerably greater when the plate was inclined at 45 degrees than when at 90 degrees to the direction of air flow.*

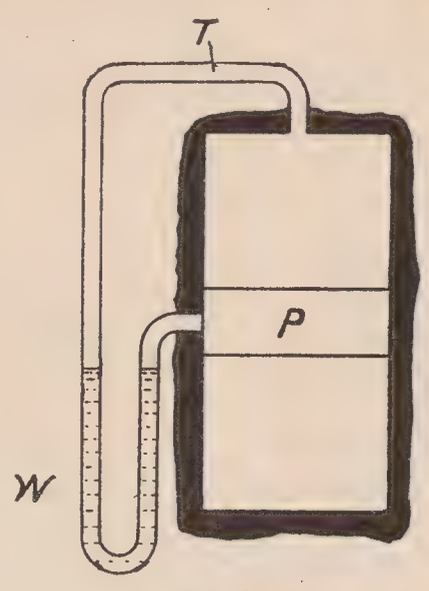

FIG. 2.

Apparatus for measuring wind pressure.

The fact is fairly well established that the pressure on the inclined roof of a house is greater near the eaves than near the ridge, and some experiments would lead us to believe that there may even be a negative pressure near this ridge, as shown in Fig. 3, where the large arrow indicates the direction of the wind and the small arrows indicate by their length and direction of pointing the intensity and sign of the normal pressure on the roof. The phenomenon of negative pressure is not at all inexplicable, if we consider the probable motion of the air over the roof as shown in Fig. 4. Experiments and observations have shown that there may be and probably always is a negative pressure or upward suction over the top of a gas holder during a heavy wind. Of course it will be understood that this is only relative to the ordinary atmospheric pressure as measured by a barometer. Mr. Irminger, of Copenhagen, by means of a registering pressure gauge, ascertained that during a wind that varied from 29 to 70 feet per second the pressure inside a gas holder 170 feet diameter and 90 feet high fell from 6.25 inches to 5.83 inches. This is equal to a lifting force of 2.2 pounds per square foot on the top of the holder. Every one is familiar with the corresponding upward pull exerted by a strong wind on an umbrella.

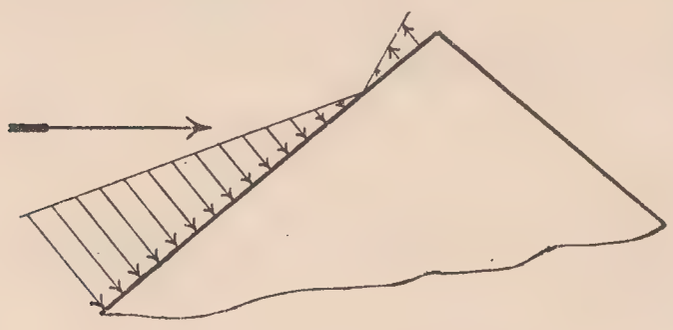

FIG. 3.

Illustrating wind pressure on a roof.

The nature of the pressure on a cylinder with a vertical axis is important, as this is the form of many structures which have to be constructed to withstand the wind. Experiments show that the positive pressure on a cylinder due to wind pressure extends over less than half its circumference (some experimenters put it at less than a fourth), the rest of the circumference being subjected to a negative pressure. Fig. 5 illustrates this, the large arrow indicating the direction of the wind and the small arrows the intensity and sign of the pressure on the cylinder. This diagram is intended, however, only to give an idea of the nature of the pressure on the cylinder and not to be correct quantitatively. For this we require further experiments. The experiments of Berthon seemed to show that the suction at the sides of the cylinder was greater than at the back, the intensity of pressure being somewhat as shown in Fig. 6.

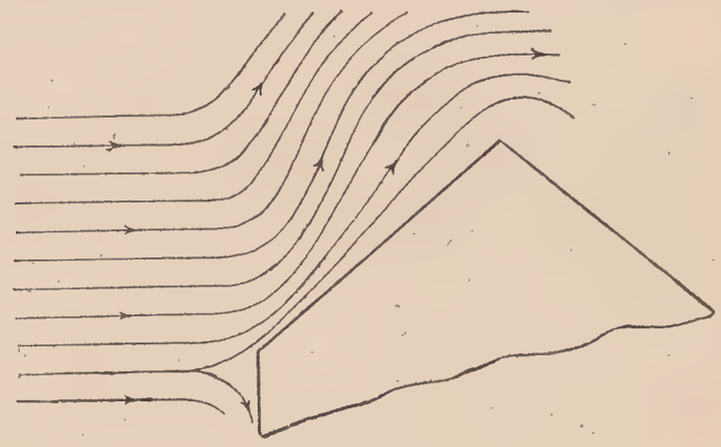

FIG. 4.

Wind striking a roof.

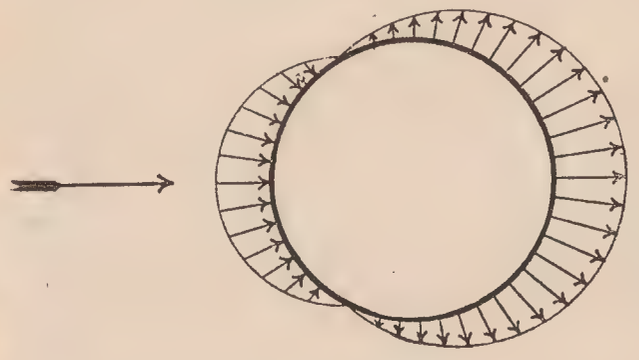

FIG. 5.

Diagram illustrating wind pressure on a cylindrical body.

(To be continued.)

* See the *Engineering Magazine*, July, 1899, page 671.

OUR ILLUSTRATIONS.

Houses, Grand boulevard, Chicago; Peabody & Beauley, architects.

Interior views New Auditorium Annex, Chicago; Holabird & Roche, architects.

Entrance Detail, New Auditorium Annex, Chicago; Holabird & Roche, architects.

"Y. M. C. A." Building at Ann Arbor, Michigan; Pond & Pond, architects, Chicago.

Detail of Entrance, Bachelor Apartments, Philadelphia; Frederick M. Mann, architect.

Church of our Lady of Mercy, Philadelphia; E. F. Durang, architect. Exterior and interior views.

The Weissinger-Gaulbert Apartment Building, Louisville, Kentucky; Kenneth McDonald and J. F. Sheblessy, architects. General view and entrance detail.

Photogravure Plate: Residence, Brookline, Massachusetts; J. A. Schweinfurth, architect.

PHOTOGRAVURE PLATES.

Issued only with the Photogravure Edition.

St. Peter's Episcopal Church, Germantown, Pennsylvania.

Police Station, Brookline, Massachusetts; J. A. Schweinfurth, architect.

Residence of R. A. White, Melrose, Pennsylvania; Albert Yarnall, architect.

Roxbury High School, Boston, Massachusetts; Andrews, Jacques & Rantoul, architects.

Interior Views, New Auditorium Annex, Chicago; Holabird & Roche, architects. Three full-page views are shown.

Correction.—The following letter is received in regard to plate of railway station at Savannah, Georgia, printed in December number:

Editor "Inland Architect":

I am in receipt of a copy of your valuable paper for the month of December, and I find in the paper, plate No. 5, Vol. XL, a cut of a railway station, "Depot for Southern Railway, Savannah, Ga., Edwards & Walter, architects." I beg to advise that this is a photograph taken from the Savannah Union Station facing on West Broad street. This building was erected for the Seaboard Air Line, Atlantic Coast Line, Plant System and Southern Railway Companies, and I have the honor to advise you that I was the architect for the building. I not only made the plans, but supervised the construction. There is evidently an error, and I will thank you to have the same corrected. The building cost $175,000. * * * * *

Yours very truly,
FRANK P. MILBURN.

A letter from Mr. W. W. Mackall, president of the Savannah Union Station Company to Mr. Milburn, corroborates the above, saying: "When the Savannah Union Station Company decided to build the depot it requested several of the leading architects of the country, including yourself, to submit competitive plans. The Board of Directors unanimously selected your plan and the credit belongs exclusively to yourself."

NEW AUDITORIUM ANNEX.

ONE of the most interesting buildings put up in Chicago during the year just closed is the new addition to the Auditorium Annex, to be known as the Congress Apartment building. The marble mosaicwork, the lighting and furnishing is all on such an elaborate scale as to warrant an extended description in these columns.

The architects, Messrs. Holabird & Roche, have designed an exterior plain and substantial to harmonize with the Annex, and proves another ornament to Michigan avenue. Wells Brothers Company, of Chicago, general contractors, have completed this building to the smallest detail, and as is their usual reputation, to the eminent satisfaction of architects and owners.

Entering from Michigan avenue, you are charmed by the brilliancy of the marble vestibule, hall and corridor, the latter connecting the new building with the Annex. Here is undoubtedly the most expensive and elegant piece of marblework in Chicago, and one of the best examples of this art in the county. The walls are of veined statuary Italian marble, set in panels and at appropriate intervals are placed fluted half columns of same marble, which adds great beauty to the effect.

The stairway at the right of the hall is worthy of special study, newel post, steps and risers all of same white marble. The illustration gives no adequate idea of the extreme beauty of this part of the hall. The floors of mosaic are a grouping of Belgian black, rouge royal French, white and red Italian marbles. The ceiling is of gold glass mosaic, set in borders of pearl and turquoise blue. The whole effect of all this veined white marble sculptured in Greek designs, floor of marble mosaic, ceiling of glass mosaic, is one of dazzling beauty. The marble contractors for the entire building, Messrs. Sherman & Flavin, Chicago, have put the best product of their large establishment into this work and it reflects great credit on the firm, its designers and artisans.

Probably no public place opened in Chicago of late years has occasioned so much comment as the Pompeiian Room. Whatever the comment may be, it certainly has aroused the interest of all artists and designers, however they may sympathize with this attempt to restore in this Western metropolis the beauty of man's habitation in the first century, A. D. The rooms, as laid out by Messrs. Holabird & Roche, left nothing to be desired in the matter of style, a room 60 by 100 feet, divided by Doric columns into three portions around three sides of a fountain pool. Above the pool an art-glass skylight, a floor of Roman mosaic, the columns to one-third of their height of verd-antique marble, the remainder of white Italian marble, with just a tinge of yellow, and beautifully marked with veins of gray, a wainscot of four feet and piers of same green marble. The green portions of the columns are a plain round, the upper white of the shafts are fluted in Doric style, the caps and moldings are bright gilt. Above the wainscot the walls and panels, high as a line with the top of the columns, are frescoed in arabesques and small wing figures, arranged irregularly on a rich red ground. The large section of the apartment reserved as a lounging-room, lying on the long side of the pool, is raised above the colonnade by an attic which opens over the skylight in a row of windows filled with art glass from Tiffany, representing gardens and arbors of the period. This clearstory forms on the remaining sides a broad frieze broken by the pilasters at set intervals. The pilasters support a cornice and ceiling in stucco, divided laterally into panels by broad beams ornamented with moldings in classic style; cornice beams and plain ceiling are decorated in red, blue and green, with a prevailing light buff ground. The panels of the frieze are filled with airy, dancing figures and landscape effects in soft, light tones; conspicuous on the ceiling are the large fruit borders, framing the panels. The borders are a literal reproduction of a Pompeiian fresco. The Tiffany art-glass skylight is a marvel of beauty, a glimpse of its purple, amber and green spanning the pool below is a recall to the vine-covered arbors and courts of the Campania. To furnish this in Pompeiian style according to all the extant relics we now have in museums and elsewhere, was a simple affair compared to the problem of making this fitment suit the requirements of a twentieth-century crowd. How was the room to be made inviting and comfortable? Chicago business men are not accustomed to lounging on couches at their feasts, in the manner of the Greeks or Romans. Neither couches nor the stiff benches with turned legs, so common among the antique relics, would be serviceable. This problem has been successfully solved by Marshall Field & Co. The modern world has few examples of ancient furniture in wood. Objects in metal are at hand, but the more perishable materials are lost. The ancient writers make frequent mention of the splendid coverings and drapes on couches and thrones. They also name the different costly and beautiful woods popular in the manufacture of tables and chairs, but little can be acquired from their descriptions in the way of design. So in the designs for the large lounging settles and chairs is used what antique detail seemed best fitted to modern use. The high curved backs are built on the line of the Greek klismos, the side and end members molded into winged griffins with leopard heads, the wings spreading backward from the arms, the claw feet resting on the floor, this portion in relief being overlaid with yellow metal. These large pieces, the larger eight feet long, are of dark brown oak, upholstered in rich red plush. The broad curved backs of the great settles are a triumph of the cabinet-maker's art.

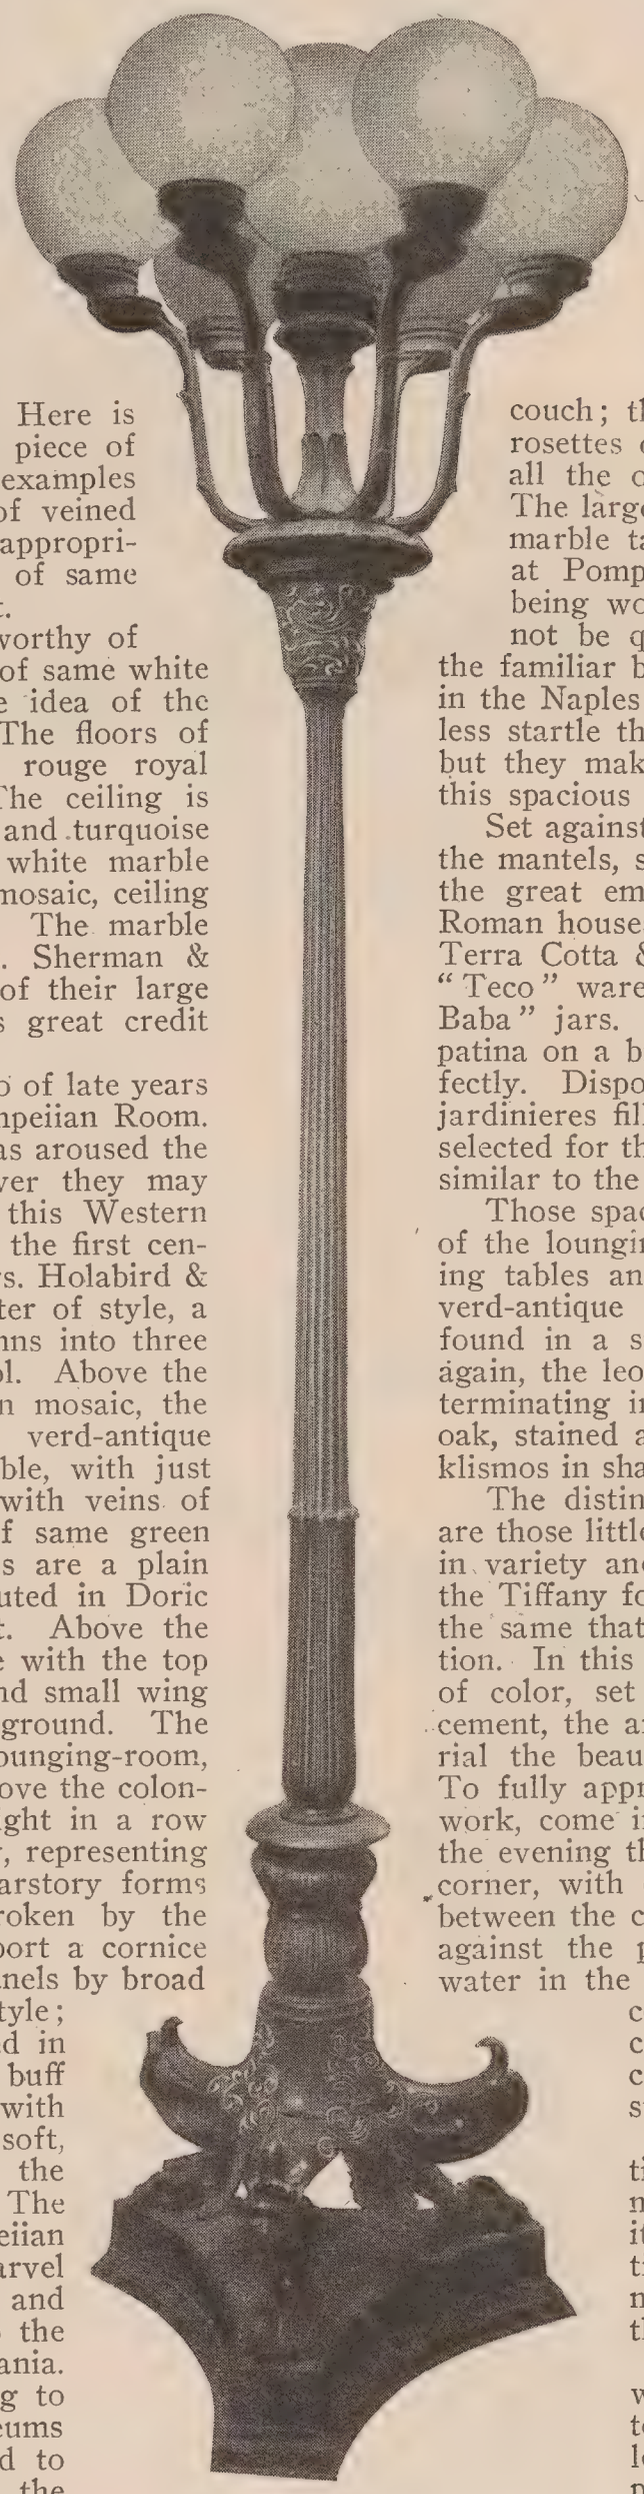

DESIGNED BY JAMES CORDAY & CO., CHICAGO.

The smaller of the armchairs are built with open frames, fitted with leather cushions tied on in a modified form of a Roman couch; the carved work consists of turned moldings, rosettes on the sides, arms terminating in dog heads. all the ornaments being overlaid with yellow metal. The large center table is an exact copy in wood of the marble table found in the house of Cornelius Rufus, at Pompeii. It is in dark brown oak, the carving being worthy of special attention, and its beauty can not be questioned. The lighting resolved itself into the familiar bronze candelabra, reproductions of which are in the Naples Museum. Their electric lamps would doubtless startle the Greek artist who originally designed them, but they make a soft and sufficient light for illuminating this spacious room.

Set against the long wall of the lounging-room, flanking the mantels, stand four huge jars. They take the place of the great emphoræ used in the classic banquet halls of Roman houses. They are from the works of the American Terra Cotta & Ceramic Co., Chicago, home of the famous "Teco" ware. Their makers have termed them the "Ali Baba" jars. Their pleasant green color (almost like the patina on a bronze) blends into the walls and marble perfectly. Disposed between the columns about the pool are jardinieres filled with ferns and palms. The models were selected for their simplicity and color, which is a dull green, similar to the large jars and of the same pottery.

Those spaces opening beyond the peristyle at both ends of the lounging-room are set with some three dozen serving tables and chairs. The tables of bronzed iron, with verd-antique marble tops, are adoptions from a motif found in a small tripod in the Vatican Museum. Here, again, the leopard's head of Bacchus is employed, the legs terminating in the hoof of a centaur. The chairs are of oak, stained a dark green brown, and are after the Greek klismos in shape.

The distinguishing features of the Greco-Roman style are those little playful fantasies in detail, forever surprising in variety and suggestion. This feeling is here found in the Tiffany fountain which stands in the midst of the pool, the same that was exhibited at the Pan-American Exposition. In this weird and beautiful creation in myriad points of color, set by a most cunning craft in some kind of cement, the artist has endeavored to interpret in his material the beauty of the geyser pools of the Yellowstone. To fully appreciate the soft, mysterious attraction of this work, come into the room in the dusk of the day, before the evening throng has assembled, sit down in a shadowed corner, with only the soft light from the sky filtering in between the columns, feel the mystery of the white marble against the purple shadows, hear the low rush of the water in the basin; then look between the palm-screened colonnade where the fountain, left to its own company, is disporting like a wild creature caught off its guard. Then you will understand it and find it entertaining.

This room is gaining a far-famed reputation, and an attempt so substantial and elegant must stand in the first rank among things of its class, and compared with similar ambitious creations in other cities, the Auditorium management have every cause to be proud of their atrium and impluvium.

The living part of the house, a portion of which is divided into apartments of from two to seven rooms, is furnished elaborately, excellent judgment being used in all details to give pleasing color effects and to make thoroughly livable quarters. The entire furnishing contract was awarded Marshall Field & Co., and has been executed in a highly artistic manner, making this hotel equal in all appointments for comfort and beauty to any in this country.

The French and English dining-rooms on the Mezzanine floor, decorated by Mandel Brothers, Chicago, are two beautifully equipped rooms for private dinner parties. The French room, being the more delicate, has bird's-eye maple woodwork, ornamented in gold. The wall panels are covered with green moire

silk and delicately painted with festoons and garlands of flowers. The ceiling panels are in allegorical design. The English dining-room is in mahogany, with a mantel of Georgia green marble. The wall panels are painted on canvas in fine landscapes. These rooms have received high encomiums for the artistic character in all details of design and finish, which were conceived and superintended by one of our most prominent decorative artists.

We would also call attention to the beautifully modeled electroliers in the hall and corridor. These are of bronze, with a slight touch of antique green in the finish; for design and execution they are not excelled, and the soft, mellow light adds charm to the marble and mosaics. These fixtures were designed especially for the hotel by James Corday & Co., Chicago.

How should a building of this kind be fire-protected? This is a momentous question, for on its decision rests the safety of the people and valuables it contains. It is a question that always demands the best thought and earnest consideration of the architect. The construction of this building has been carried out, so far as the steel and iron columns and beams are concerned, in the usual manner of vogue construction. These steel and iron columns are surrounded by and protected with hollow clay, porous terra-cotta lumber fireproofing; all partitions are also of this material of the Illinois Terra Cotta Lumber Company, of Chicago. On top of this fireproofing is metal lathing on which hard

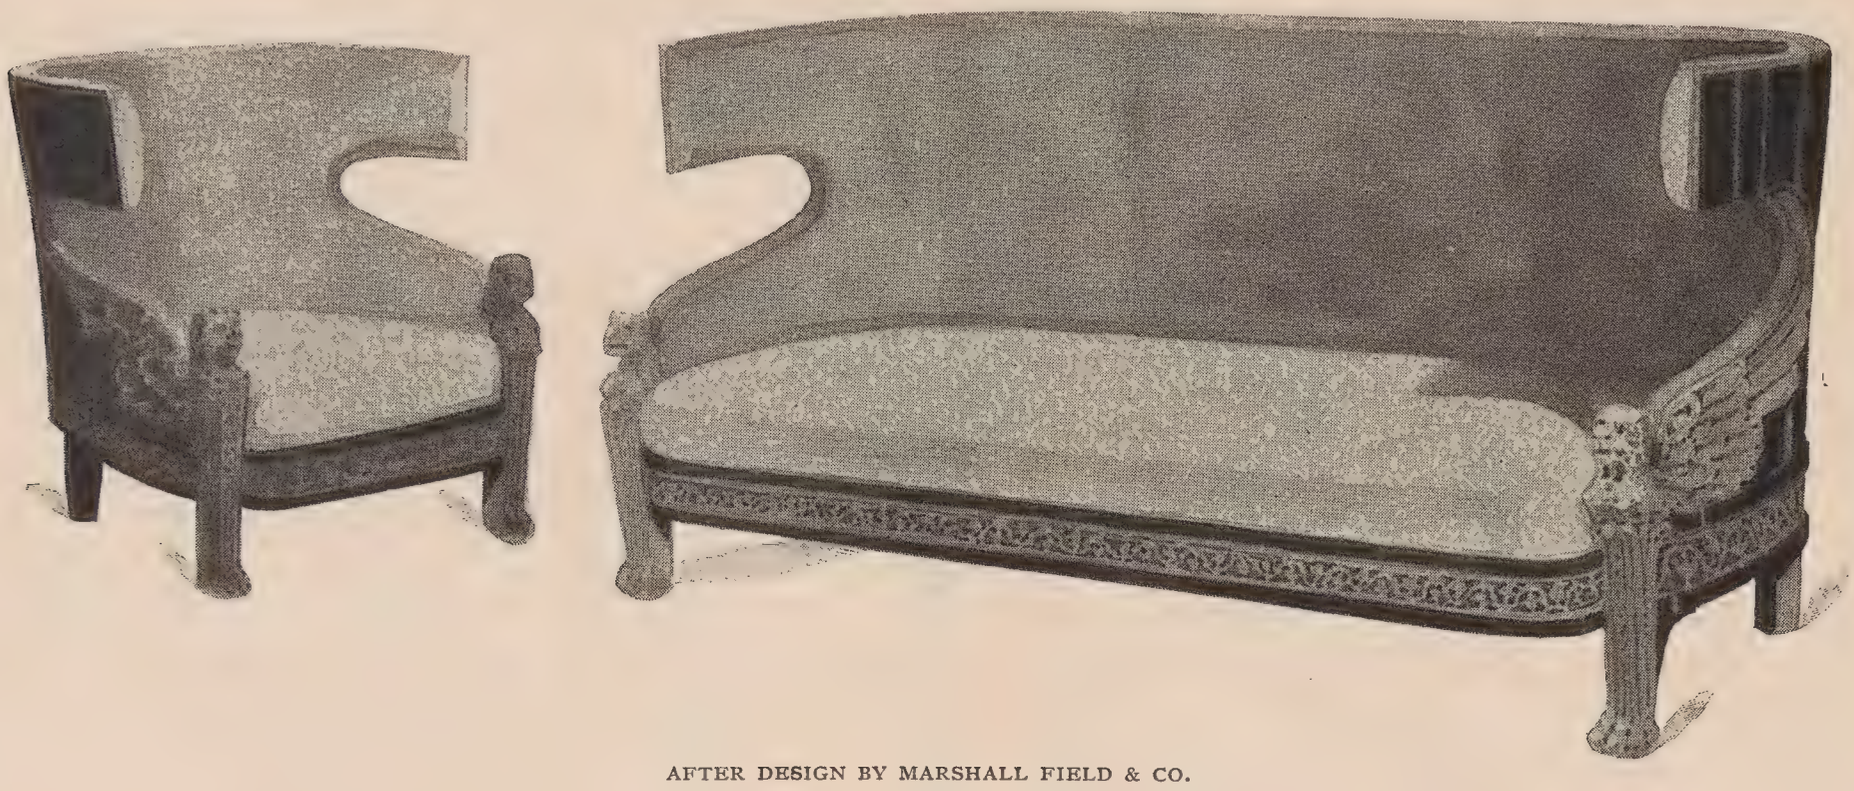

AFTER DESIGN BY MARSHALL FIELD & CO.

AFTER DESIGN BY MARSHALL FIELD & CO.

plaster is placed. Porous terra-cotta lumber is made from blue clay. By a peculiar process of mixing and burning the completed product is made porous. Experience has proven that the interior of a room or shaft protected by this material can burn fiercely for hours without endangering the rest of the structure. The fireproofing, being hollow and porous, gives the same protection as a chimney and is quite as safe. All pipes and wires are run through specially provided openings protected with this fireproofing, and no unsightly pipes or valves are visible.

One of the most interesting features of the construction of this building are the thirteen floors, including roof and basement, which consist of a system of hollow-clay tile arches sprung between the steel beams. On top of these arches is placed four and one-half inches of cement construction, which constitutes the floors, the only wood used being a strip two inches square laid in the cement around the edge of the rooms for the purpose of allowing the carpets to be held in place. The floor area of cement, laid by the Rudolph S. Blome Company, formerly Stamsen & Blome, of Chicago, is about one hundred and forty-three thousand square feet of concrete floors. This firm also constructed the concrete sidewalk and alley pavement. So carefully has the matter of fire protection been looked after that the soffits of the windows, one of the weakest points in a building while on fire, has had specially modeled terra-cotta lumber fireproofing flanges, to set well in the walls, thus avoiding any chance that the flames, pouring out of a window, might have of eating their way up to the floor above by any opening in the soffit. This building is without doubt one of the most advanced in fire protection that has been constructed.

The hardware was furnished by the Orr & Lockett Hardware Company, who supplied all the hardware for the Auditorium and the original Annex. It differs from that used on the other two buildings, being strictly colonial. The doors are all hung on ball-bearing hinges and the beautiful bubble-glass knobs make a pleasing effect against the mahogany doors. This too often neglected item of the proper hardware finish thus completes the embelishment of this superb interior.

PAINTS IN ARCHITECTURE.

THE PEELING OF PAINT.

An erroneous impression prevails among painters that zinc in paint causes it to crack and peel. The fact is that both defects are too common with all kinds of paint, and that when it occurs it is usually, more or less, the painter's fault. No properly designed and properly ground paint applied to fresh, well-seasoned wood in dry weather will begin to crack while the oil in it remains elastic, and no paint will fail to crack in time, if left to itself.

The whole question resolves itself into a matter of judgment as to the safe time limit for repainting. When the paint has become brittle and lost its hold on the pores of the wood, fresh paint will always pull it loose. Repainting should be done before that critical period arrives; then there will be no peeling, even if straight zinc be used. If the under coat has passed the danger point, scraping is the only remedy, whether the paint be lead, zinc or something else.

The painter who accepts a job of repainting without ascertaining the condition of the old paint and insisting on proper procedure, runs the risk of defrauding either himself or his customer, and we know it is usually the latter. If all painters followed the rule of a well-known New York suburban contractor, there would be fewer shabby jobs; if the old paint has passed the limit of safety, he will not accept the job of repainting unless scraping off the old coats be included in the contract.

Charles Jourdain.

MOSAICS.

The seventh competition for the John Stewardson Memorial Scholarship in Architecture is announced for the $1,000 traveling scholarship of 1903. The preliminary examinations will commence April 1 and the final examinations close on May 23. There will be required in the final examination a design for "an official building for a county." The candidates, according to the rules governing this scholarship, must be under thirty years and have studied or practiced architecture in the State of Pennsylvania one year.

BUFFALO FAN SYSTEM

OF

Heating, Ventilating AND Drying

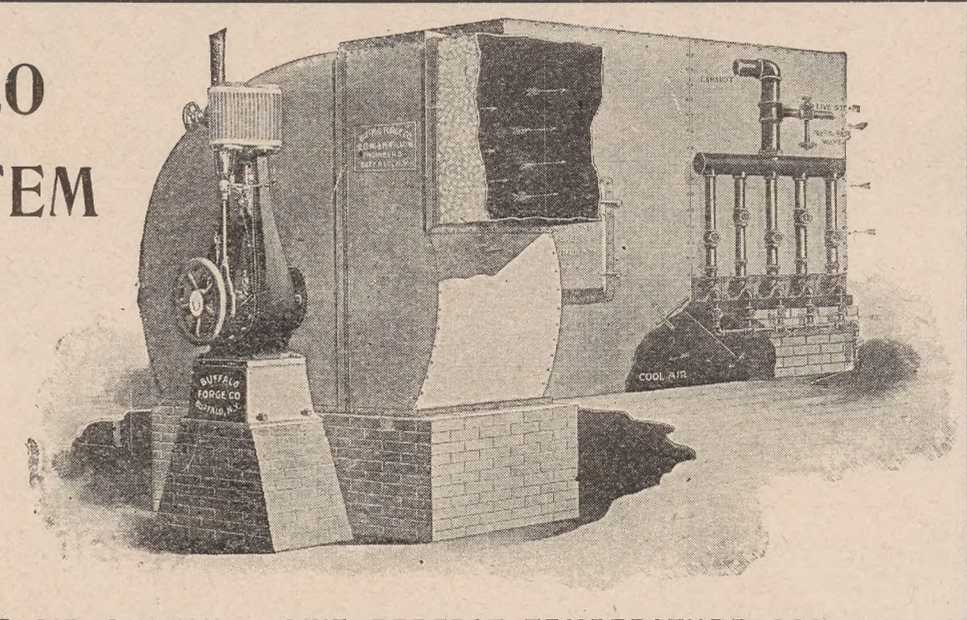

INSURE ADEQUATE AIR SUPPLY. GIVE PERFECT TEMPERATURE CONTROL
PERMIT EASY REGULATION OF HUMIDITY.

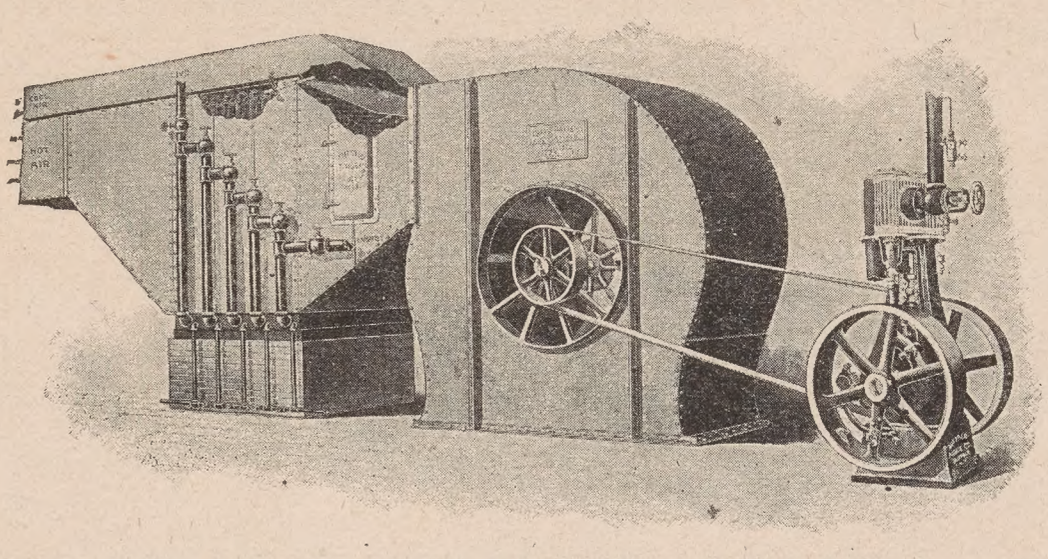

BUFFALO FORGE COMPANY,

CHICAGO OFFICE, 22-24 RANDOLPH ST. BUFFALO, N. Y. NEW YORK OFFICE, 39 CORTLANDT ST.

SPECIFICATION REMINDER

FOR THE USE OF

Architects, Builders

AND OTHERS.

A complete summary of items of every branch of building work. A very useful book for those who have to do with the erection and construction of buildings. Price, 50 cents per copy. Apply to

WILLIAM H. SAYWARD,
Secretary of the National Association of Builders,
166 Devonshire St. BOSTON, MASS.

"Big Four" Route.

CHICAGO

TO

INDIANAPOLIS,
CINCINNATI,
LOUISVILLE.

SOUTH and SOUTHEAST

THE SCENIC LINE TO

Hot Springs, Va., and
Washington, D. C.

Via the

Chesapeake & Ohio R'y.

J. C. TUCKER, G. N. A.
234 Clark Street, CHICAGO.

Roof Proof

That M F Roofing Tin is the best roofing material is demonstrated by roof proof in every city and town of the whole land. Here is a business block familiar to every resident of Pittsburg. It was covered with

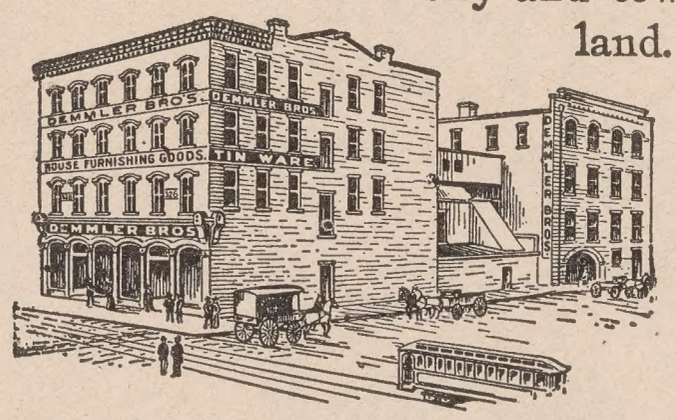

M F Roofing Tin

more than fifty years ago, and has had no repairs. The roof is as sound as ever to-day and good for many years yet. Do you want a roof that will not leak; that is weatherproof and almost **wearproof?**

Ask your roofer about M F Roofing Tin

or write { W. C. CRONEMEYER, Agent, Carnegie Building, Pittsburg.

AMERICAN TIN PLATE COMPANY, New York.

.....WANTED.....

Two experienced structural steel draftsmen.

RUSSEL WHEEL & FOUNDRY CO.
DETROIT, MICHIGAN

NATIONAL FIRE PROOFING COMPANY

STANDARD METHODS OF

HOLLOW AND POROUS TILE

FIREPROOFING

OFFICES

FRICK BUILDING - - - - - - PITTSBURGH
170 BROADWAY - - - - - - - NEW YORK
NORTH AMERICAN BUILDING - - PHILADELPHIA
TREMONT BUILDING - - - - - - BOSTON
HARTFORD BUILDING - - - - - CHICAGO

PIONEER

FIRE-PROOFING COMPANY

1515 Marquette Building

CHICAGO

CONTRACTORS FOR FIRE-PROOFING OF BUILDINGS

MANUFACTURERS OF CLAY PRODUCTS

The Architectural Index

Being a Monthly Index to a Selected List of Periodicals on Architecture and Allied Subjects

It embraces the principal publications of the United States, Canada, England, Germany and France.
It indexes alphabetically every article in them.
It redeems the articles from their miscellaneous character, making them easily accessible and therefore of inestimable value.
It will help you by locating articles on certain subjects concerning which you wish to be informed, giving the number and page of the periodicals containing such matter.
It is compiled by experts.
It costs only One Dollar a year.
Its value can not be demonstrated here.
Send Ten Cents for a sample copy and you will realize how valuable it is to you.

The Architectural Index

729 Sixth Avenue *NEW YORK*

MINNEAPOLIS AND ST. PAUL

FINE SERVICE — ILLINOIS CENTRAL RAILROAD — FROM CHICAGO

CENTRAL MISSISSIPPI VALLEY ROUTE

New First-Class Through Line

from Chicago via Dubuque, Waterloo and Albert Lea. Fast Vestibule Night train with through Sleeping Car, Buffet-Library Car and Free Reclining Chair Car. Dining Car Service en route. Tickets of agents of I. C. R. R. and connecting lines.

A. H. HANSON, G. P. A., CHICAGO.

Mr. Architect: REASONS WHY YOU SHOULD USE

Dexter Brothers' English Shingle Stains

BECAUSE they will outwear paint or any other stain.
BECAUSE they preserve the shingle.
BECAUSE they do not give a painted effect to the shingle.
BECAUSE they do not change as other stains do.
BECAUSE they have no disagreeable odor.
BECAUSE they are used on the best work from Maine to California.
BECAUSE they are used by people who want the best of everything.

Exclusively used on the shingled country houses of *Mr. George Vanderbilt* at Biltmore, *Mr. J. Pierpont Morgan*, Adirondacks, *Hon. Wm. C. Whitney*, Westbury, L. I., *Mr. Thomas W. Lawson*, Egypt, Mass.

Manufactured by

DEXTER BROTHERS
103-105-107 Broad Street
BOSTON

H. M. HOOKER CO., Agents
57 W. Randolph Street
CHICAGO

W. S. HUESTON, Agent
81 Fulton Street
NEW YORK

BUTCHER'S BOSTON POLISH
is the best finish made for
FLOORS, . . .
Interior Woodwork and Furniture.
Circulars Sent on Application.
For Sale by Dealers in Painters' Supplies.

MANUFACTURED BY THE
BUTCHER POLISH CO.,
356 Atlantic Ave., Boston, Mass.

OUR No. 3 REVIVER IS A SUPERIOR FINISH FOR KITCHEN AND PIAZZA FLOORS.

IRON and TIN ROOF PAINT
THE PROPERTY OWNER SAVES MONEY WHEN THE ROOF IS PROPERLY PAINTED WITH
DIXON'S SILICA-GRAPHITE PAINT
ADDRESS
JOSEPH DIXON CRUCIBLE CO., Jersey City, N. J.

MERCANTILE BUILDINGS
Equipped throughout with up-to-date lighting apparatus — show window and show case reflector and sectional glass cluster reflectors for interior lighting. Brilliant, economical, durable. Our cluster reflectors are the most practical fixtures in existence for lighting stores, offices, hospitals, restaurants, banks, asylums, public and institutional buildings generally. Investigation invited.
I. P. FRINK, 551 Pearl Street, New York.

CRANE FITTINGS
ESTABLISHED 1855

CONVENIENT TRAINS
Leave St. Paul and Minneapolis daily
. . VIA . .
Wisconsin Central R'y
. . FOR . .
MANITOWOC, MILWAUKEE, CHICAGO,
where direct connections are made for the East and South.
Nearest ticket agent can give you complete information.
JAS. C. POND, Gen. Pass. Agent,
MILWAUKEE, WIS.

E. ELDON DEANE,
ARCHITECTURAL COLORIST, AND ILLUSTRATOR,
63 SEYMOUR BUILDING
Fifth Ave., corner 42d Street,
NEW YORK.

Please mention THE INLAND ARCHITECT when corresponding with Advertisers.

ESTABLISHED 1872 INCORPORATED 1890

ORR & LOCKETT HARDWARE CO.

CHICAGO.

71 & 73 Randolph Street.

MANUFACTURERS, WHOLESALE AND RETAIL DEALERS

Builders' Hardware

ART METAL-WORK OF ALL KINDS.

Cooling Rooms.

Mechanics' Tools.

Table and Pocket Cutlery.

Our selection comprises THE BEST from all the leading factories, as well as our own, and our heavy purchases enable us to offer you these goods at prices which can not fail to please.

We have many specialties which we manufacture and control which can not be found anywhere else.

Orr & Lockett Hardware Co.

71 & 73 RANDOLPH STREET.

Telephone, Central 551.

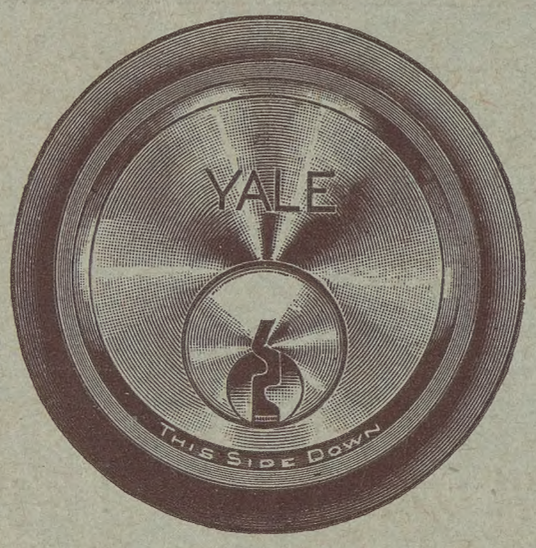

The Yale Lock

with Paracentric Key affords the highest standard of security, and is made in hundreds of styles and sizes, adapted to almost every possible use, from a jewel-case to a prison door.

Little Brochures, "What is a Genuine Yale Lock," "Yale Night Latches," "Artist and Artisan," etc., will be sent on request.

The YALE & TOWNE Mfg. Company.

Chicago Office:
131 Wabash Avenue.

IF YOU SPECIFY

SAMSON SPOT CORD

You can tell at a glance that no other Sash Cord is substituted. It is warranted to be of the best cotton stock, smooth finish and perfect braid.

SAMSON CORDAGE WORKS
BOSTON, MASS.

Front Doors and Window Sash

and all other woodwork exposed to severe weather conditions need a varnish that is specially made to resist exposure. For all such work you will obtain satisfactory results if you

USE SPAR COATING

EDWARD SMITH & CO.

Varnish Makers and Color Grinders

45 Broadway, New York City,

59 Market Street, Chicago.

PIERCE

OUR GRIFT
STANDS FOR PERFECTION
HOUSE-HEATING
BOILERS
Have proved safe and reliable in actual operation under the most varied conditions. Supply a mild, equal, health-giving warmth during even the severest weather. May be installed in old buildings as well as new. No dust or ashes in the living rooms of the home.
Pierce, Butler & Pierce Mfg. Co.
Syracuse, N.Y., U.S.A.
New York, Boston, Philadelphia.